


# Rack Automatic Transfer Switch

Next generation ATS with multiple receptacle outputs that eliminate the need for a secondary rack PDU downstream of rack ATS

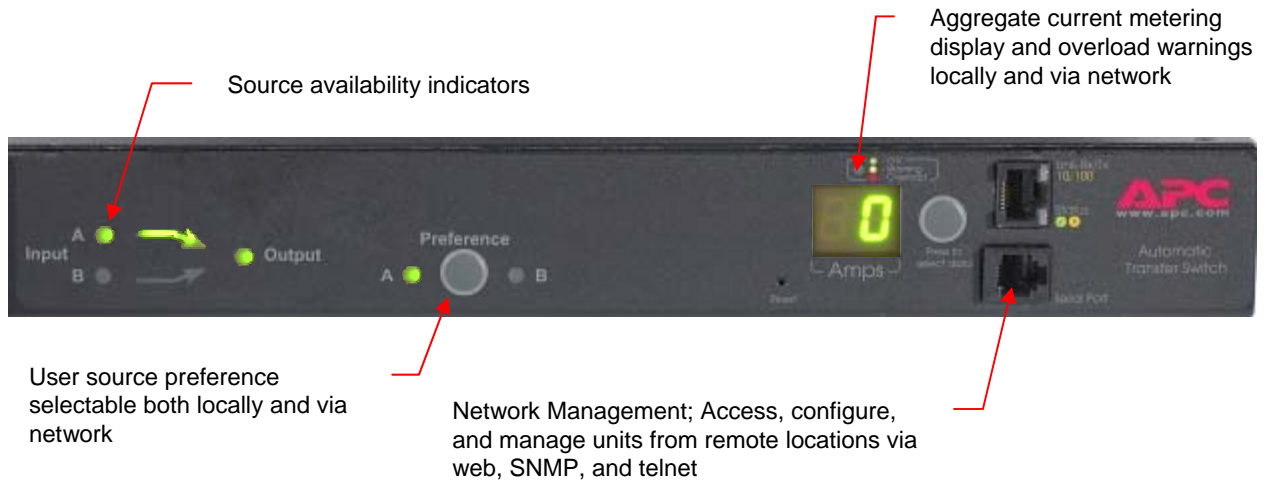

- Automatic switching power redundancy to single corded equipment
- Effective solution for maintenance bypass needs
- Continuous source monitoring
- Robust out-of-phase switching capability
- Typical switching time of 8-12ms  
16ms max @ 60 Hz, 18ms max @ 50 Hz

## 2U Model Example



## 1U Models Example



SKU	Voltage	Input Feed	Form Factor	Input	Output Receptacles	Circuit Breaker	Current Metering	On-Unit Display
AP7721	230V	10A	1U	IEC C14 inlet	(12) C13	No	√	√
AP7723	230V	16A	1U	IEC C20 inlet	(8)C13, (1)C19	No	√	√
AP7724	230V	32A	2U	IEC309 32A	(16)C13, (2)C19	(2) 16A	√	√
AP7722	230V	16	1U	IEC309 16A	(1)IEC309 16A	No	√	