
Description

TS32GJF500 is a 32GB USB Flash Drive with 1pcs of 32Gbx8 (or 2pcs of 16Gbx8) Flash Memory assembled on printed circuit board.

Outline

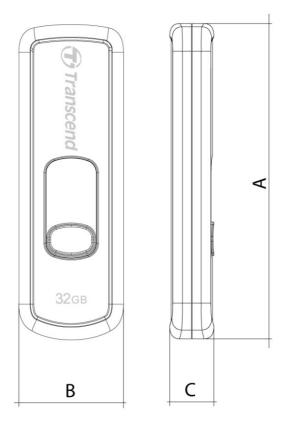

Features

- Capless design uses a sliding USB
- Slider Color: Purple
- Fully compatible with USB 2.0
- Easy Plug and Play installation
- USB powered. No external power or battery needed
- Transcend elite software pack*

System Requirement

- Hardware: Desktop or notebook computer with USB port
- Operating System: Windows[®] 7/ Vista/ XP/ Me/ 2000 and Mac[™] OS 9.0 or later, Linux[™] Kernel 2.4.2 or later

Dimensions

| Side | Millimeters | Inches |
|------|-------------|------------------|
| Α | 63.10 ± 0.2 | 2.48 ± 0.008 |
| В | 21.0 ± 0.2 | 0.83 ± 0.008 |
| С | 8.80 ± 0.2 | 0.35 ± 0.008 |

*JetFlash software pack

| Function | on | |
|------------|---|--|
| Favorites | | |
| Secret-Zip | | |
| PC-Lock | PC-Lock makes JetFlash a key to your computer E-Mail backup your e-mails | |
| E-Mail | | |
| | backup, restore and synchronize your data | |

Pinouts

| Pin No. | Pin Name | Function |
|---------|----------|--------------------------|
| 01 | VCC | USB power input |
| 02 | USB- | LICD differential signal |
| 03 | USB+ | USB differential signal |
| 04 | VSS | Ground |

Specifications

| Storage Capacity | 32GB** | |
|----------------------|--|--|
| Connector Durability | 10,000 times | |
| System Performance | Read: 21MB/sec (max.), Write: 10MB/sec (max.) | |
| Wear-leveling | Dynamic | |
| Power Supply | DC 5V±10%, Max current : 200 mA | |
| Temperature Range | re Range Operation: 0°~70°C, Non-Operating: -20°C~75°C | |
| Certificates | CE, FCC, BSMI, C-tick, KCC | |

Above technical information is based on industry standard data and tested to be reliable. However, Transcend makes no warranty, either expressed or implied, as to its accuracy and assumes no liability in connection with the use of this product. Transcend reserves the right to make changes in specifications at any time without prior notice.

^{** 1}GB = 1 billion bytes. A certain portion of the storage capacity may be reserved for firmware and maintenance use.