


P45DE

Intel® P45 + ICH10 Chipsets

ASRock
www.asrock.com

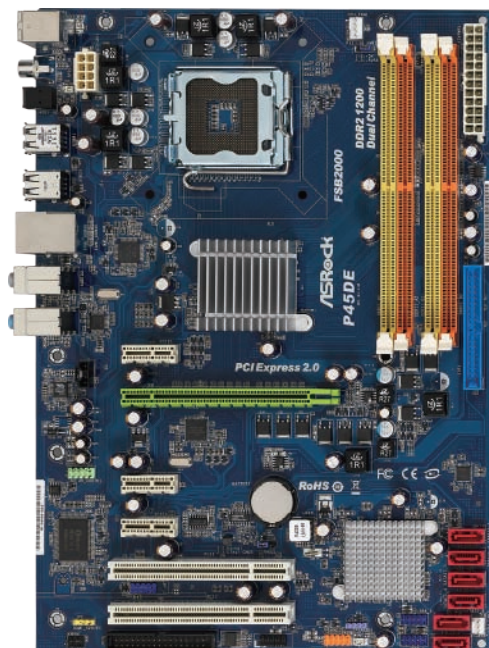

FSB
2000
MHz

4xDDR2 1200

PCI-E 2.0



PCIE
Gigabit LAN

OC Tuner

Smart BIOS

Intelligent
Energy Saver

Product Brief <<<

- Supports FSB2000 MHz
- Supports Dual Channel DDR2 1200 (OC)
- 7.1CH Windows® Vista™ Premium Level HD Audio (VIA® VT1708S Audio Codec with QSound function)
- PCIE Gigabit LAN
- Supports ASRock Instant Boot
- Supports Smart BIOS, ASRock OC Tuner, Intelligent Energy Saver

Detail Specification <<<

Platform	- ATX Form Factor: 12.0-in x 8.5-in, 30.5 cm x 21.6 cm
CPU	<ul style="list-style-type: none"> - LGA 775 for Intel® Core™ 2 Extreme / Core™ 2 Quad / Core™ 2 Duo / Pentium® Dual Core / Celeron® Dual Core / Celeron®, supporting Penryn Quad Core Yorkfield and Dual Core Wolfdale processors - Compatible with FSB2000/1600/1333/1066/800 MHz - Supports Hyper-Threading Technology - Supports Untied Overclocking Technology - Supports EM64T CPU
Chipset	<ul style="list-style-type: none"> - Northbridge: Intel® P45 - Southbridge: Intel® ICH10
Memory	<ul style="list-style-type: none"> - Dual Channel DDR2 memory technology - 4 x DDR2 DIMM slots - Supports DDR2 1200*/1066/800/667 non-ECC, un-buffered memory - Max. capacity of system memory: 16GB <p><small>*DDR2 1200 memory modules will operate in overclocking mode</small></p>
Expansion Slot	<ul style="list-style-type: none"> - 1 x PCI Express 2.0 x16 slot (green @ x16 mode) - 3 x PCI Express x1 slots - 2 x PCI slots
Audio	- 7.1 CH Windows® Vista™ Premium Level HD Audio (VIA® VT1708S Audio Codec)
LAN	<ul style="list-style-type: none"> - PCIE x1 Gigabit LAN 10/100/1000 Mb/s - Realtek RTL8111DL - Supports Wake-On-LAN
Rear Panel I/O	I/O Panel <ul style="list-style-type: none"> - 1 x PS/2 Mouse Port - 1 x PS/2 Keyboard Port - 1 x Coaxial SPDIF Out Port - 1 x Optical SPDIF Out Port - 6 x Ready-to-Use USB 2.0 Ports - 1 x RJ-45 LAN Port with LED (ACT/LINK LED and SPEED LED) - HD Audio Jack: Side Speaker / Rear Speaker / Central / Bass / Line in / Front Speaker / Microphone
Connector	<ul style="list-style-type: none"> - 6 x SATAII 3.0 Gb/s connectors, support NCQ, AHCI and Hot Plug functions - 1 x ATA133 IDE connector (supports 2 x IDE devices) - 1 x Floppy connector - 1 x IR header - 1 x COM port header - 1 x HDMI SPDIF header - CPU/Chassis FAN connector - 24 pin ATX power connector - 8 pin 12V power connector - CD in header - Front panel audio connector - 3 x USB 2.0 headers (support 6 USB 2.0 ports)
BIOS Feature	<ul style="list-style-type: none"> - 8Mb AMI BIOS - AMI Legal BIOS - Supports "Plug and Play" - ACPI 1.1 Compliance Wake Up Events - Supports jumperfree - SMBIOS 2.3.1 Support - CPU, DRAM, NB, SB, VTT Voltage Multi-adjustment - Supports I. O. T. (Intelligent Overclocking Technology) - Supports Smart BIOS
Support CD	- Drivers, Utilities, AntiVirus Software (Trial Version)
Unique Feature	<ul style="list-style-type: none"> - ASRock OC Tuner - Intelligent Energy Saver - Instant Boot - Hybrid Booster: <ul style="list-style-type: none"> - CPU Frequency Stepless Control - ASRock U-COP - Boot Failure Guard (B.F.G.)
Hardware Monitor	<ul style="list-style-type: none"> - CPU Temperature Sensing - Chassis Temperature Sensing - CPU Fan Tachometer - Chassis Fan Tachometer - CPU Quiet Fan - Voltage Monitoring: +12V, +5V, +3.3V, CPU Vcore
OS	- Microsoft® Windows® 2000 / XP / XP 64-bit / Vista™ / Vista™ 64-bit compliant
Certifications	- FCC, CE, WHQL
Accessories	<ul style="list-style-type: none"> - Quick Installation Guide, Support CD, I/O Shield - ATA 133 Cable - 2 x SATA Data Cables (Optional) - 1 x SATA 1 to 1 Power Cable (Optional)

The specification is subject to change without notice. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not guaranteed.

P45DE

Intel® P45 + ICH10 Chipsets

ASRock®
www.asrock.com

ASRock Instant Boot

ASRock Instant Boot is a new feature invented exclusively by ASRock. It can boot up system in an amazing speed, which is 10 times faster than traditional boot up. For home users or office PC users, ASRock Instant Boot can also keep your data safe, guarantee a clean Windows OS, and consumed less power! For details:

<http://www.asrock.com/feature/InstantBoot/index.asp>

* This function is applicable ONLY to single user that does not secure ID and Password to their systems.

Instant Boot Interface

This function is designed with two main options:

● Enable Instant Boot

Fast Mode: It takes only 3 to 4 seconds to boot up the system. You may start using your computer, running Office, browsing internet and even MSN instantly.

Regular Mode: It only takes half of the traditional boot-up time to start the system. The boot up experience is safe and fast.

● Disable Instant Boot

Instant Boot can also be disabled when you do not want to use this application.

Note: The actual boot up time is subject to the different models and configurations.



10 Times Faster, Only 4 Secs to Boot Up to Windows!

ASRock YouTube

<http://tw.youtube.com/watch?v=BucljXZVxXo>



Pro and Cons of various shut down modes

From this sum up table, we can find that ASRock Instant Boot not only excels in the Boot Up speed (3~4 sec.), it also provides data safety, clean OS, and saves the most power energy.

	No Shut Down	Traditional boot up	S3	S4	Instant Boot	
					Fast Mode	Regular Mode
Boot Up Time	Best ●	Worse ● 50~60 sec	Best ●	Good ● 20~22 sec.	Best ● 3~4 sec.	Good ● 20~22 sec.
Data Security (AC Power Off accidentally)	Worse ● Data Lost	Best ● Safe!	Worse ● Data Lost	Best ● Safe!	Best ● Safe!	Best ● Safe!
Cleanliness of OS	Fair ● Accumulated garbage data	Best ● Clean	Fair ● Accumulated garbage data	Fair ● Accumulated garbage data	Best ● Clean	Best ● Clean
Power Consumption (Light loading)	Worse ● 60W~100W	Best ● 1W~3W	Best ● 1W~3W	Best ● 1W~3W	Best ● 1W~3W	Best ● 1W~3W

● Best ● Good ● Fair ● Worse