



Philips Brilliance
LCD monitor with
Lightframe™

22" w X-line

Brilliance



220X1SW

For your eyes only!

Reduce eye fatigue with Innovative Lightframe LCD

Delivering unique vision-friendly, fatigue-reducing viewing for the whole family plus elegant, eye-catching style, Lightframe LCDs are a feast for the eyes, designed for people who spend long hours working in front of a computer screen.

Amazing viewing experience free from eye-fatigue

- Reduce your eye fatigue with innovative lighting technology
- SmartImage: Optimized user friendly display experience
- TrueVision: Laboratory quality display performance
- Glossy piano white finish design to enhance your home decor

A pure treat for your eyes

- SmartContrast 30000:1 for incredible rich black details
- Fast response time up to 2ms
- DVI-D input and HDCP support

Designed for your convenience

- Dual input accepts both analog VGA and digital DVI signals
- One-touch format switching between wide and 4:3 ratios
- USB port for convenient peripheral connections

PHILIPS


sense and simplicity

Highlights

Lightframe™


Lightframe is Philips LCD technology triggered by turning on the Lightframe to reduce eyestrain by surrounding your monitor frame with blue light that stimulates your visual senses for improved concentration and promotes an overall feeling of well-being.

SmartImage

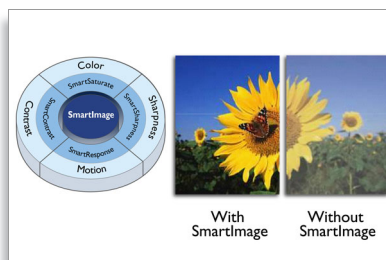

SmartImage is an exclusive leading edge Philips technology that analyzes the content displayed on your screen and gives you optimized display performance. This user friendly interface allows you to select various modes like Office, Image, Entertainment, Economy etc., to fit the application in use. Based on the selection, SmartImage dynamically optimizes the contrast, color saturation and sharpness of images and videos for ultimate display performance. The Economy mode option offers you major power savings. All in real time with the press of a single button!

TrueVision

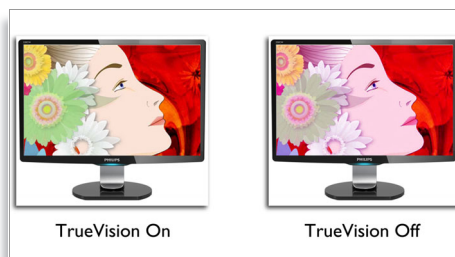

TrueVision is industry-leading, proprietary Philips testing and algorithm technology for monitor adjustment and fine tuning, an extensive process that ensures ultimate display performance in compliance with a standard four-times more stringent than Microsoft's Vista requirements from each and every monitor that leaves the factory - not just a few review samples. Only Philips goes to these lengths to deliver this exacting level of color accuracy and display quality in every new monitor.

SmartContrast ratio 30000:1




You want the LCD flat display with the highest contrast and most vibrant images. Philips advanced video processing combined with unique extreme dimming and backlight boosting technology results in vibrant images. SmartContrast will increase the contrast with excellent blacklevel and accurate rendition of dark shades and colors. It gives a bright, lifelike picture with high contrast and vibrant colors

2ms GtG response time



GtG response time is the average time that it takes for a pixel to go from one arbitrary position to another, which is the average time of transition between several sets of random color levels. Faster is better: Lower response time means faster transitions and, therefore, results in fewer visible image artifacts in the display of fast moving images. GtG response time is an important way to measure display quality of multimedia content like movies, videos and games.

Auto picture format button

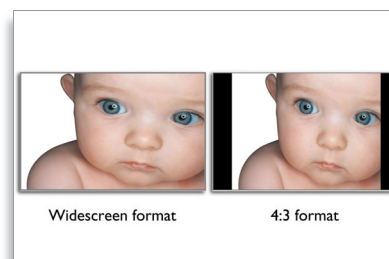

Philips auto picture format is a button that switches from the 4:3 aspect ratio to the widescreen mode and back again to match the display's aspect ratio with your content for working with wide documents without scrolling or viewing widescreen media in the widescreen mode and distortion-free, native mode display of 4:3 ratio content.



Specifications

Picture/Display

- LCD panel type: 1680 x 1050 pixels, Anti-glare polarizer, RGB vertical stripe
- Panel Size: 22 inch / 55.9 cm
- Aspect ratio: 16:10
- Pixel pitch: 0.282 x 0.282 mm
- Brightness: 250 cd/m²
- SmartContrast: 30000:1
- Contrast ratio (typical): 1000:1
- SmartResponse: 2 ms (Gray to Gray)
- Response time (typical): 5 ms
- Optimum resolution: 1680 x 1050 @ 60Hz
- Viewing angle: 160° (H) / 160° (V), @ C/R > 10
- Picture enhancement: SmartImage
- Display colors: 16.7 M
- Scanning Frequency: 30 - 83 kHz (H) / 56 - 75 Hz (V)
- sRGB

Connectivity

- Signal Input: VGA (Analog), DVI-D
- USB: USB 2.0 x 1
- Sync Input: Separate Sync, Sync on Green

Convenience

- User convenience: SmartImage, SmartControl II, Picture format selection, LightFrame, Menu, Input, Auto, Power On/Off
- OSD Languages: English, French, German, Italian, Russian, Simplified Chinese, Spanish, Portuguese
- Other convenience: Kensington lock
- Plug & Play Compatibility: DDC/CI, Windows 98/2000/XP/Vista, sRGB

Stand

- Tilt: -5/20 degree

Power

- ECO mode: <17.5W
- On mode: <20W (EnergyStar 5.0 test method)
- Off mode: <0.5 W
- Power LED indicator: Operation - Blue, Stand by/sleep -blue(blinking)
- Power supply: Built-in, 100-240VAC, 50/60Hz

Dimensions

- Product with stand (mm): 429 x 517 x 201 mm
- Product without stand (mm): 350 x 517 x 74 mm
- Packaging in mm (WxHxD): 570 x 482 x 134 mm

Weight

- Product with stand (kg): 4.88 kg
- Product without stand (kg): 4.53 kg
- Product with packaging (kg): 6.46 kg

Operating conditions

- MTBF: 50,000 hour(s)
- Relative humidity: 20%-80 %
- Temperature range (operation): 0°C to 40°C °C
- Temperature Range (storage): -20°C to 60°C °C

Sustainability

- Environmental and energy: EPEAT Silver, RoHS, EnergyStar 5.0

Compliance and standards

- Regulatory Approvals: CE Mark, SEMKO

Cabinet

- Color: White



Issue date 2010-05-27

Version: 3.0.4

12 NC: 8670 000 52391
EAN: 87 12581 48164 3

© 2010 Koninklijke Philips Electronics N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com