


TS2GJFT3

2GB USB2.0 JetFlash® T3

Description

TS2GJFT3 is a 2GB USB Flash Drive with 1pcs of 2Gx8 Flash Memory assembled on printed circuit board.

Outline

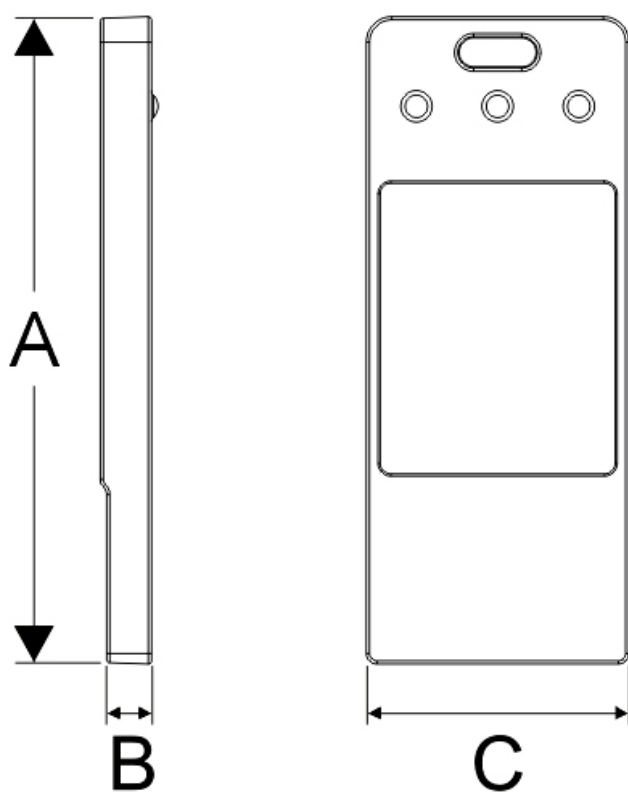

Features

- Easy Plug and Play installation
- USB powered. No external power or battery needed
- JetFlash elite software pack

System Requirement

- Hardware: Desktop or notebook computer with USB port
- Operating System: Windows® 7/ Vista/ XP/ Me/ 2000 and Mac™ OS 9.0 or later, Linux™ Kernel 2.4.2 or later

Dimensions

| Side | Millimeters | Inches |
|------|-----------------|------------------|
| A | 30.3 ± 0.08 | 1.19 ± 0.003 |
| B | 2.4 ± 0.05 | 0.48 ± 0.002 |
| C | 12.3 ± 0.05 | 0.1 ± 0.002 |

JetFlash Software Pack

| Function | |
|------------|--|
| Favorites | Store your favorite website addresses |
| AutoLogin | Automatically login to websites |
| Secret-Zip | Compress and/or password protect saved files |
| PC-Lock | Makes JetFlash a key to your computer |
| E-Mail | Securely send, receive and save e-mails |
| DataBackup | Backup, restore and synchronize your data |

TS2GJFT3

2GB USB2.0 JetFlash® T3

Pinouts

| Pin No. | Pin Name |
|---------|----------|
| 01 | VCC |
| 02 | USB- |
| 03 | USB+ |
| 04 | VSS |

Pin Identification

| Symbol | Function |
|--------|---|
| USB- | USB differential signal: |
| USB+ | The pairs are used to transmit Data/Address/Command |
| VSS | Ground |
| VCC | USB power input |

Specifications

| | |
|----------------------|--|
| Storage Capacity | 2GB* |
| Connector Durability | 10,000 times |
| System Performance | Read: 14MB/sec (max.), Write: 4MB/sec (max.) |
| Power Supply | DC 5V \pm 10% , Max current : 200 mA |
| Temperature Range | Operation: 0-70°C, Storage: -20°C-75°C |
| Certificates | CE, FCC, BSMI |

Above technical information is based on industry standard data and tested to be reliable. However, Transcend makes no warranty, either expressed or implied, as to its accuracy and assumes no liability in connection with the use of this product. Transcend reserves the right to make changes in specifications at any time without prior notice.

* 1GB = 1 billion bytes. A certain portion of the storage capacity may be reserved for firmware and maintenance use.