
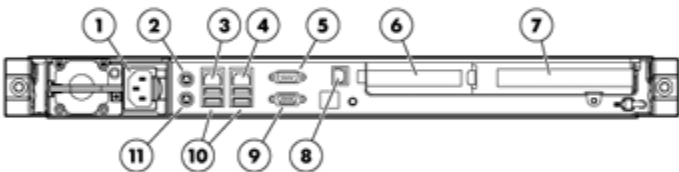


Overview

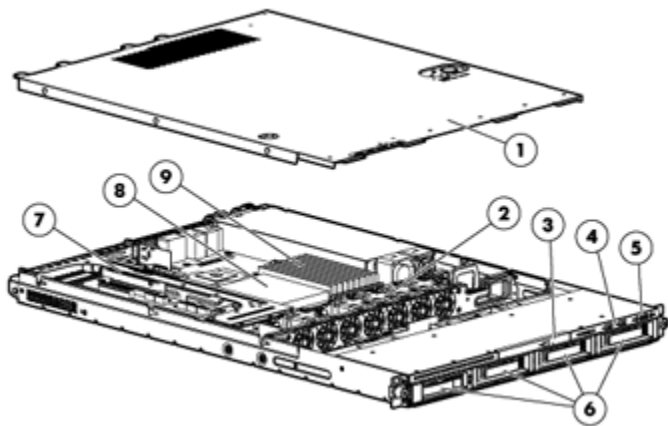

Front View:

1. Cover
2. Non Hot Plug Dual Rotor Fans
3. Optional Slim 9.5mm DVD ROM
4. USB connectors (2)
5. Power Button, UID button, and Front LED Indicators
6. Support for up to four SATA or SAS Hard Drives or SSD's
7. Two PCI-Express Slots (2 PCI-Express 2.0 x16 connectors standard)
8. Processor Socket (Intel Xeon, Core 2 and Quad Core)
9. Nine DDR3 Memory Slots

Rear View:

1. Power supply
2. Mouse connector
3. NIC 1 Port/Shared iLO 2 Management Port
4. NIC 2 Port
5. Serial connector
6. PCI Express expansion slot 5, low-profile, half-length
7. PCI Express expansion slot 4, (optional PCI-X, full-length)
8. Dedicated Integrated Lights-Out 2 (ProLiant Onboard Administrator powered by integrated Lights-Out 2) management port (optional)
9. Video connector
10. USB connectors (4)
11. Keyboard connector

What's New

- Adding Intel Xeon E5530 with Performance Model
- Adding 400W Redundant Power Supply Kit

At a Glance

The HP ProLiant DL320 G6 Server is an enterprise rack-optimized server at an entry level price. The highly manageable 1 processor, 1U server is ideal for single-application IT infrastructure, web and edge-of-network applications.

The HP infrastructure management capabilities, combined with other Insight software, give the DL320 G6 enterprise-class management features. Support for 1 or 2 low-cost Serial ATA drives on an integrated RAID0/1 controller, with an optional upgrade to highly reliable hot plug SAS hard drives, gives the DL320 G6 flexibility to meet the needs of your datacenter. Plus, you get the cost-effective solution of a single-processor platform with options from the new Intel® Xeon® Processor 3000 sequence with turbo mode.

- Processor:



## Overview

- 1 Quad-Core or Dual-Core Intel Xeon processor 5500 series
  - Intel 5500 Chipset with up to 6.4GT/s QPI
- Memory:
  - Nine (9) DIMM slots
  - Up to 72GB, using DDR3 Registered (RDIMM) memory, operating at 800MHz when fully populated at 3 DIMMs per Channel in 9 Slots
- Storage Controller:
  - Entry & High Efficiency Models: HP Smart Array B110i SATA RAID Controller (RAID 0/1/1+0)  
 NOTE: Transfer rate: 1.5Gb/s SATA
  - Performance Models: HP Smart Array P410/256MB Controller (RAID 0/1/1+0/5/5+0)  
 NOTE: Available upgrades: Battery Kit upgrade (for BBWC), 512MB with BBWC, and Smart Array Advanced Pack (SAAP)
- Internal Drive Support:
  - Standard four 3.5" (Large Form Factor) hot-plug SATA or SAS hard drives
  - Internal storage capacity of up to 4TB (4 x 1TB SATA/SAS hard drives)
  - SAS drives require optional SAS Host Bus Adapter (HBA) or Smart Array Controller
  - Optional DVD or DVD-RW drive
- Network Controller:
  - Embedded NC326i Dual Port Gigabit Server Adapter
- Expansion Slots:
  - Two total slots:
    - (1) Full length PCI Express x16 slot (x16 connector)
  - Can be replaced with a full-length 64-bit /133MHz PCI-X slot
    - (1) Half-length, low-profile PCI Express x1 slot (x4 connector)
- USB 2.0 Ports & SD:
  - Up to 7 Total: (2) front; (1) internal (optional); (4) rear accessible ports
  - Internal USB port (optional) for flexible storage, security, or USB drive key deployment  
 NOTE: In order to connect a USB device internally, the internal USB Cable G6 Kit must be used (536769-B21)
  - (1) Internal Secure Digital (SD) slot  
 NOTE: Blank SD media devices are supported for use with VMware and Citrix only. SD media must be installed in the internal slot of the ProLiant server. Learn more at: <http://www.hp.com/go/proliantvirtualization>
- Redundancy:
  - Hot plug power with optional redundancy (Included in Performance models)
- Infrastructure Management:
  - Convenient slide-out Systems Insight Display for quick and easy front view server diagnostics, along with status LEDs, Automatic Server Recovery (ASR), ROM Based Setup Utility (RBSU)
  - HP ProLiant Onboard Administrator (powered by the HP Integrated Lights-Out 2 management processor) for simplified server setup, health monitoring and recovery, power and thermal control, and lights-out remote administration.
  - HP Insight Control (ICE) suites, as product options, deliver essential infrastructure management that can help save time and money by making it easy to deploy, monitor, control and optimize your IT infrastructure through a single, simple management console. ICE suites support both Windows and Linux-based servers and management consoles
  - HP Insight Dynamics - VSE suite for ProLiant servers, a product option, is an integrated command center that enables you to continuously analyze and optimize your adaptive infrastructure. This advanced infrastructure management software lets you reduce the cost of common data center tasks by as much as 40 percent while keeping pace with your changing business.
- Operating Systems and Virtualization Software Support for ProLiant Servers:
  - Supports Windows, RHEL, SLES, OEL
- Deployment/Serviceability:
  - Customer Self Repair (CSR): HP products are designed with many CSR parts to minimize repair time and allow for greater flexibility in performing defective parts replacement
  - Fixed, mounting rails included with all models
- Form Factor:

## Overview

- 1U (1.70" / 4.32 cm) Rack Mount Chassis
- 27.56" (70.00 cm) Deep
- Warranty:
  - This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and parts repair is available for three years Next Business Day, with three year on-site support from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Expanded support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.
  - NOTE: Server Warranty includes three year parts, three year labor, and three year on-site support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

Standard Features

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

|   |  |
|---|--|
| Processor                               | Quad-Core Processors   |
| One of the following depending on Model | Intel® Xeon® Processor E5504 (2.00 GHz, 4MB L3 Cache, 80W, DDR3-800)   |
|   | Intel® Xeon® Processor E5506 (2.13 GHz, 4MB L3 Cache, 80W, DDR3-800)   |
|   | Intel® Xeon® Processor E5520 (2.26 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)   |
|   | Intel® Xeon® Processor E5530 (2.40 GHz, 8MB L3 Cache, 80W, DDR3 1066, HT, Turbo 1/1/2/2)   |
|   | Intel® Xeon® Processor E5540 (2.53 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)   |
|   | Intel® Xeon® Processor L5506 (2.13 GHz, 4MB L3 Cache, 60W, DDR3-800)   |
|   | Intel® Xeon® Processor L5520 (2.26 GHz, 8MB L3 Cache, 60W, DDR3-1066, HT, Turbo 1/1/2/2)   |
|   | Intel® Xeon® Processor W3520 (2.63GHz, 8MB L3 Cache, 130W, DDR3-1066, HT, Turbo 1/1/1/2)   |
|   | Intel® Xeon® Processor W3540 (2.93GHz, 8MB L3 Cache, 130W, DDR3-1066, HT, Turbo 1/1/1/2)   |
|   | Dual-Core Processors   |
|   | Intel® Xeon® Processor E5502 (1.86 GHz, 4MB L3 Cache, 80W, DDR3-800)   |
|   | NOTE: HT indicates that the processor model supports Intel® Hyper-Threading Technology.  |
|   | NOTE: Turbo indicates the maximum potential frequency increment when using Intel® Turbo Boost Technology, with 4, 3, 2, and 1 cores active.  |
|   | NOTE: DDR3 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.   |
|   | NOTE: For the Intel 5500 Series, the letter preceding the model number indicates the performance/wattage of the processor. ; "E" denotes Enterprise Performance/Wattage (Mainstream); and "L" denotes Lower Wattage. |

|   |                             |
|---|-----------------------------|
| Cache Memory                            | 4MB (1 x 4MB) Level 3 Cache |
| One of the following depending on Model | 8MB (1x8M) Level 3 Cache    |

|         |  |
|---------|--|
| Chipset | Intel 5500 Chipset   |
|         | NOTE: For more information regarding Intel chipsets, please see the following URL: <a href="http://www.intel.com/products/server/chipsets/">http://www.intel.com/products/server/chipsets/</a> . |

|                   |  |
|-------------------|--|
| Memory Protection | Advanced ECC   |
|                   | Mirroring mode   |
|                   | Lock-step mode   |
|                   | NOTE: Xeon W3500 processor family does not support any of above advanced features. |

Standard Features

|   |                                   |   |
|---|-----------------------------------|---|
| Memory<br><a href="#">One of the following depending on Model</a> | Type                              | DDR3 1067/1333 Registered (RDIMM) and Unbuffered (UDIMM)  |
|   | Standard (Entry Models)           | 4 GB (2 x 2 GB) RDIMM   |
|   | Standard (High Efficiency Models) | 4 GB (2 x 2 GB) UDIMM   |
|   | Standard (Performance Models)     | 6 GB (3 x 2 GB) RDIMM   |
|   | Maximum Memory                    | Up to 72 GB, using DDR3 Registered (RDIMM) memory, operating at 800MHz when fully populated at 3 DIMMs per Channel in 9 Slots.<br>Up to 24 GB, using DDR3 Unbuffered (UDIMM) memory, operating at 1066MHz when fully populated at 2 DIMMs per Channel in 6 slots. |

|                    |  |
|--------------------|--|
| Network Controller | Embedded NC326i Dual Port Gigabit Server Adapter |
|--------------------|--|

Expansion Slots

| Expansion Slots # | Technology              | Bus Width** | Connector Width | Bus Number* | Form Factor                                 | Notes   |
|-------------------|-------------------------|-------------|-----------------|-------------|---|---|
| 5<br>(Standard)   | PCIe                    | x4          | x16             | 10          | Low profile (half length, half height) slot |   |
| 4<br>(Standard)   | PCIe                    | x16         | x16             | 21          | Full length, full height slot               | This PCIe slot can be replaced with optional PCI-X slot below |
| 4<br>(Optional)   | PCI-X (133MHz, 3.3Volt) | 64-bit      | Not applicable  | 24          | Full length, full height slot               |   |

\* Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number

\*\* Indicates the number of physical electrical lanes running to the connector.

|                     |                        |  |
|---------------------|------------------------|--|
| Storage Controllers | Entry Models           | HP Smart Array B110i SATA RAID Controller (RAID 0/1/1+0)<br><a href="#">NOTE: Transfers rate: 1.5Gb/s SATA</a><br><a href="#">NOTE: Hot Plug SAS and SATA controllers available via PCI card option.</a> |
|                     | High Efficiency Models | HP Smart Array B110i SATA RAID Controller (RAID 0/1/1+0)<br><a href="#">NOTE: Transfers rate: 1.5Gb/s SATA</a><br><a href="#">NOTE: Hot Plug SAS and SATA controllers available via PCI card option.</a> |
|                     | Performance Models     | HP Smart Array P410/256MB Controller (RAID 0/1/1+0/5/5+0)<br><a href="#">NOTE: Available upgrades: Battery Kit upgrade (for BBWC), 512MB with BBWC, and Smart Array Advanced Pack (SAAP)</a>             |

|         |               |  |
|---------|---------------|--|
| Storage | Optical Drive | Optional: 9.5mm DVD-ROM, or DVD RW drive |
|         | Hard Drives   | None ship standard                       |

Standard Features

|                                |   |   |         |
|--------------------------------|---|---|---------|
| Maximum Internal Storage Type  | SATA (4HDD models - requires optional 4HDD cage)  | 4TB   | 4 x 1TB |
|                                | SAS (4HDD models - requires optional PCI controller)  | 4TB   | 4 x 1TB |
| Interfaces                     | Serial  | 1   |         |
|                                | Pointing Device (Mouse)   | 1   |         |
|                                | Keyboard  | 1   |         |
|                                | VGA   | 1   |         |
|                                | Network RJ-45   | 2   |         |
|                                | SD Slot   | 1   |         |
|                                | USB 2.0   | 7 (2 front, 1 internal (optional), 4 rear)<br>NOTE: Please see the following URL for additional information regarding USB support. In order to connect a USB device internally, the internal USB Cable G6 Kit must be used (536769-B21).<br><a href="http://h18004.www1.hp.com/products/servers/platforms/usb-support.html">http://h18004.www1.hp.com/products/servers/platforms/usb-support.html</a> |         |
|                                |   |   |         |
| Graphics                       | Integrated ATI ES1000, 32 MB video standard   |   |         |
|                                | <ul style="list-style-type: none"><li>16 bit color: maximum resolution of 1600 x 1200</li><li>32 bit color: maximum resolution of 1280 x 1024</li></ul> NOTE: Maximum resolution available via iLO 2 remote console is 1280 x 1024. |   |         |
| Form Factor                    | Rack (1U), (1.70 in/4.32 cm), 26.85" deep   |   |         |
| Core Infrastructure Management | HP Insight Foundation suite   | Managing the growing number of servers can be complex and expensive for your organization. IT managers need to address changing business needs with tools that meet the challenges of managing today's complex Datacenters.   |         |
|                                |   | HP provides management solutions that are designed to simplify a server's installation, configuration and maintenance throughout the entire server lifecycle. This provides the customer with higher levels of operational efficiency and highly reliable systems: <a href="http://www.hp.com/go/foundation">www.hp.com/go/foundation</a> .   |         |
|                                |   | The foundation pack includes: <ul style="list-style-type: none"><li>HP SmartStart</li><li>HP Management</li><li>HP ProLiant Firmware Maintenance</li></ul>  |         |
|                                |   | SmartStart version supported (minimum): SmartStart 8.20<br><a href="http://www.hp.com/servers/smartstart">http://www.hp.com/servers/smartstart</a>  |         |
|                                | ProLiant Onboard Administrator  | HP ProLiant Onboard Administrator (powered by the HP Integrated Lights-Out 2 management processor) simplifies server setup, health monitoring, power  |         |



### Standard Features

#### HP Insight Control (ICE) suites

and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP ProLiant Onboard Administrator functions without additional software, and can be accessed from any location via a web browser. It works hand-in-hand with HP Systems Insight Manager, Insight Control suites, and the Insight Dynamics-VSE suite helping customers unlock the value of the ProLiant platform and deliver the highest possible quality of IT service to the business. See [www.hp.com/go/ProLiantOA](http://www.hp.com/go/ProLiantOA)

HP Insight Control (ICE) suites, as product options, deliver essential infrastructure management that can help save time and money by making it easy to deploy, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. ICE suites install and license software modules that are integrated into HP System Insight Manager.

Two Insight Control suites are available, to serve environments requiring either Linux-based or Windows-based management consoles: HP Insight Control suite for Linux (ICE-LX), and HP Insight Control suite (ICE). See [www.hp.com/go/insightcontrol](http://www.hp.com/go/insightcontrol)

HP Insight Control suites include one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: <http://www.hp.com/services/insight>.

#### HP Insight Dynamics - VSE suite

The HP Insight Dynamics - VSE suite for ProLiant, a product option, is an integrated command center that enables you to continuously analyze and optimize your adaptive infrastructure. This advanced infrastructure management software that allows you to analyze and optimize your adaptive infrastructure to manage physical and virtual resources in the same way. HP Insight Dynamics - VSE gives you a powerful toolkit to accelerate complex technology projects and simplify daily operations. It enables you to plan capacity and power continuously, balance across physical and virtual resources, ensure cost-effective high availability, and provision infrastructure consistently.

HP Insight Orchestration, an optional extension to Insight Dynamics - VSE, enables IT organizations to provision infrastructure consistently and automatically from pools of shared resources using a self-service portal. Resources provisioned can range from a single virtual machine to complex multi-tier environments and their associated physical and virtual resource requirements.

HP Insight Recovery, also an optional extension for Insight Dynamics - VSE, enables cost-effective disaster recovery for physical and virtual environments. Application environments can be reactivated in minutes with the touch of a button to a remote location

**NOTE:** For more information, visit:

<http://www.hp.com/go/insightdynamics>,

<http://www.hp.com/go/insightorchestration>,

<http://www.hp.com/go/insightrecovery>

Standard Features

|                              |                                |
|------------------------------|--------------------------------|
| Industry Standard Compliance | ACPI 2.0 Compliant             |
|                              | PCI 3.0 Compliant              |
|                              | PXE Support                    |
|                              | WOL Support                    |
|                              | Microsoft® Logo certifications |
|                              | USB 2.0 Support                |
|                              | IPMI 2.0                       |

|                           |   |
|---------------------------|---|
| Intelligent Manageability | Automatic Server Recovery (ASR)                                       |
|                           | iLO 2 Advanced Pack (optional)  |
|                           | HP Systems Insight Manager  |
|                           | Integrated Management Log   |
|                           | Drive Parameter Tracking (with Smart Array Controllers)               |
|                           | Dynamic Sector Repairing (with Smart Array Controllers)               |
|                           | Pre-Failure Warranty (covers processors, SAS hard drives, and memory) |
|                           | BIOS Serial Console   |
|                           | Front and Rear Unit ID (UID) button/LED                               |

|          |   |
|----------|---|
| Security | Power-on password                           |
|          | USB Port control                            |
|          | Removable optical drive assembly (optional) |
|          | Removable DVD-ROM Drive Assembly (optional) |
|          | Dedicated iLO2 port (optional)              |
|          | Serial interface control                    |
|          | Administrator's password                    |

Security - Trusted Platform Module

The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: [www.hp.com/go/TPM](http://www.hp.com/go/TPM)

NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.  
NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.



Standard Features

|  |  |  |
|--|--|--|
| Server Power Cords   | North America  | One 6' Highline (IEC-IEC) power cord ships standard                          |
|  | Japan  | One 6' Highline (IEC) power cord and one 6' Lowline power cord ship standard |
|  | ROW  | One 6' Highline (IEC) power cord ships standard                              |
| NOTE: HP ProLiant DL320 G6 servers ship standard worldwide with a C13 to C14 2M Highline jumper cord. Japanese models also include a 2M Lowline power cord. If customers require a local power cord, they can check the power cord matrix for the appropriate country specific cord. Please see the following power cord matrix: <a href="http://www.hp.com/go/powercordmatrix">http://www.hp.com/go/powercordmatrix</a> |  |  |
| Power Supply   | Entry Models   | 400Watts, non-redundant, 72% Efficiency                                      |
|  | High Efficiency Models   | 500Watts, non-redundant, 92% Efficient                                       |
|  | Performance Models   | (2) 400Watts, redundant hot plug power supplies, 85% Efficient               |
| NOTE: This power supply is needed to support power capping and power monitoring.   |  |  |
| Common Slot ProLiant   | • 460Watts, Common Slot, non-redundant, 92% Efficiency   |  |
|  | • NOTE: This power supply is needed to support power capping and power monitoring  |  |
|  | HP's ProLiant Common Slot Power 460W supply meets multiple Energy Efficiency Initiatives. Climate Savers Computing Initiative GOLD, ECOS Consulting 80PLUS GOLD and plans on offering models that meet the Energy Star for Server requirements when they are published.  |  |
| UPS and PDU Power Cord Matrix  | Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: <a href="http://www.hp.com/products/powercords">www.hp.com/products/powercords</a> .   |  |
| System Fans  | 5 dual rotor fans ship standard  |  |
| Ultra Thin Rack Deployment Overview  | For the Ultra Thin Rack Deployment Overview, including best practices for the HP ProLiant DL320 G6, please see the following URL: <a href="http://www.hp.com/servers/proliantdl320-g6">www.hp.com/servers/proliantdl320-g6</a> .   |  |
| Required Cabling   | For required cabling information, refer to the Web site at: <a href="http://www.hp.com/servers/proliantdl320-g6">www.hp.com/servers/proliantdl320-g6</a> .   |  |
| Operating Systems and Virtualization Software Support for ProLiant Servers   | <a href="#">Microsoft Windows Server</a><br><a href="#">Microsoft Windows Server Hyper V</a><br><a href="#">Red Hat Enterprise Linux (RHEL)</a><br><a href="#">SUSE Linux Enterprise Server (SLES)</a><br><a href="#">Oracle Enterprise Linux (OEL)</a><br><a href="#">Solaris</a><br><br>NOTE: Support differences will exist between the SATA and SAS configurations.<br>NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <a href="http://www.hp.com/go/ossupport">www.hp.com/go/ossupport</a> and our driver download site <a href="http://www.hp.com/support/DL320G6">www.hp.com/support/DL320G6</a> . |  |

Standard Features

|                                 |   |
|---------------------------------|---|
| Rack Airflow Requirements       | <p><b>Rack 10000 G2 series Cabinets</b></p> <p>The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The 10000 G2 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors.</p> <p><b>CAUTION:</b> If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment:</p> <ul style="list-style-type: none"><li>• <u>Front and rear doors:</u> If your 42U server rack includes closing front and rear doors, you must allow 5,350 sq cm (830 square inches) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation).</li><li>• <u>Side:</u> The clearance between the installed rack component and the side panels of the rack must be a minimum of 7 cm (2.75 inches)</li></ul> <p><b>CAUTION:</b> Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels results in improper cooling that can lead to thermal damage.</p> <p><b>NOTE:</b> For additional information, refer to the Setup and Installation Guide or the Documentation CD provided with the server, or to the server documentation located in the Support section at the following URL: <a href="http://www.hp.com/servers/proliantdl320g6">www.hp.com/servers/proliantdl320g6</a>.</p> |
| Rack Kit                        | <p>Quick deploy rail system provides tool-free support for racks with square or round mounting holes (including Compaq/HP 7000, 9000, 10000 G2 and HP series), with an adjustment range of 24" - 36". The ambidextrous cable management arm can be mounted on either the left or right side for improved cable management.</p>  |
| Telco Rack Support              | <p>Support for all 2-post Telco racks requires the use of the standard rack kit and an additional option kit from Rack Solutions at: <a href="http://www.racksolutions.com/hp/">http://www.racksolutions.com/hp/</a></p>  |
| HP Factory Express Capabilities | <p>HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.</p> <p>Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.</p> <p>For more information on Factory Express services for your specific server model please contact your sales representative or go to: <a href="http://www.hp.com/go/factory-express">http://www.hp.com/go/factory-express</a>.</p>  |
| HP Enterprise Configuration     | <p>The HP eConfigure-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance. <a href="http://www.hp.com/products/configurator">http://www.hp.com/products/configurator</a>.</p>   |

### Standard Features

**Service and Support** HP Care Pack Services provide total care and support expertise with committed response times designed to meet your IT and business needs.

HP Care Pack services include coverage for the HP branded hardware options qualified for the server that are purchased at the same time or afterward and internal to the enclosure. It also includes the 22-inch and smaller external monitors and tower UPS options up to 3kVA. These items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included and standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

To fully capitalizing on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of support solutions provides a range of support services designed to meet the varying needs of your business. Whether an SMB, or large global corporation, HP has ProLiant server support offers to help you speedily deploy and maximize system uptime.

Recommended Service - simplify ProLiant solution implementation, maintenance, and management.

- Support - 3 Year 9x5 Next Business Day coverage, excluding HP holidays only
- Deployment Service - HW Installation only

Enhanced Service - optimize service level to increase IT performance and availability.

- Support - 3 Year 13x5 Same Business Day, 4-Hour response coverage only
- Deployment Service - Installation and Start up only

Refer to the information on the Installation of a ProLiant on the ProLiant Data Sheet; to be delivered on a scheduled basis 8am-5pm, M-F, excluding HP holidays.

**NOTE:** For a complete listing of service offerings and information visit:

<http://www.hp.com/services/proliantservices>

<http://www.hp.com/go/proliant/carepack>

Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

|                                    |                    |  |
|------------------------------------|--------------------|--|
| HP DL320 G6 Entry Models           | Processors         | Intel® Xeon® Processor E5502 (1.86 GHz, 4MB L3 Cache, 80 Watts, DDR3-800)                    |
| HP DL320G6 E5502 505682-xx1        | Cache Memory       | 4MB L3 Cache   |
|                                    | Memory             | 4 GB (2 x 2 GB) DDR3 RDIMM   |
|                                    | Network Controller | Embedded NC326i Dual Port Gigabit Server Adapter   |
|                                    | Storage Controller | HP Smart Array B110i SATA RAID Controller (RAID 0/1/0+1)                                     |
|                                    | Hard Drives        | None ship standard   |
|                                    | Internal Storage   | Up to 4 x 1TB 3.5" Hot plug SATA/SAS, Maximum<br>NOTE: SAS requires optional PCI Controller. |
|                                    | Optical Drive      | Optional   |
|                                    | Power Supply       | Auto-sensing 400-Watt PFC Power Supply, CE Mark Compliant                                    |
|                                    | Fans               | 5 dual rotor fans ship standard  |
|                                    | Form Factor        | Rack (1U), (1.70 in/4.32 cm)   |
| HP DL320 G6 High Efficiency Models | Processors         | Intel® Xeon® Processor L5506 (2.13 GHz, 4MB L3 Cache, 60W, DDR3-800)                         |
| HP DL320G6 L5506 505683-xx1        | Cache Memory       | 4MB L3 Cache   |
|                                    | Memory             | 4 GB (2 x 2 GB) DDR3 UDIMM   |
|                                    | Network Controller | Embedded NC326i Dual Port Gigabit Server Adapter   |
|                                    | Storage Controller | HP Smart Array B110i SATA RAID Controller (RAID 0/1/0+1)                                     |
|                                    | Hard Drives        | None ship standard   |
|                                    | Internal Storage   | Up to 4 x 1TB 3.5" Hot plug SATA/SAS, Maximum<br>NOTE: SAS requires optional PCI Controller. |
|                                    | Optical Drive      | Optional   |
|                                    | Power Supply       | 500-Watt PFC Power Supply, CE Mark Compliant   |
|                                    | Fans               | 5 dual rotor fans ship standard  |
|                                    | Form Factor        | Rack (1U), (1.70 in/4.32 cm)   |

Models

|                                   |                    |  |
|-----------------------------------|--------------------|--|
| HP DL320 G6<br>Performance Models | Processors         | Intel® Xeon® Processor E5530 (2.40 GHz, 8MB L3 Cache, 80W, DDR3 1066, HT, Turbo 1/1/2/2) |
|                                   | Cache Memory       | 8MB L3 Cache   |
| HP DL320G6 E5530<br>505684-xx1    | Memory             | 6 GB (3 x 2 GB) DDR3 RDIMM   |
|                                   | Network Controller | Embedded NC326i Dual Port Gigabit Server Adapter   |
|                                   | Storage Controller | HP Smart Array P410/256MB Controller   |
|                                   | Hard Drives        | None ship standard   |
|                                   | Internal Storage   | 4 x 1TB 3.5" Hot plug SATA/SAS   |
|                                   | Optical Drive      | Optional   |
|                                   | Power Supply       | (2) 400W Redundant Hot Plug Power Supply   |
|                                   | Fans               | 5 dual rotor fans ship standard  |
|                                   | Form Factor        | Rack (1U), (1.70 in/4.32 cm)   |

|                  |       |        |
|------------------|-------|--------|
| Country Code Key | xx=00 | U.S.   |
|                  | xx=20 | Brazil |
|                  | xx=29 | Japan  |
|                  | xx=37 | APD    |
|                  | xx=42 | Euro   |
|                  | xx=AA | PRC    |

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: HP does not allow factory integration of options into standard models listed above. Configure-to-order servers must start with a CTO Chassis.

NOTE: FIO indicates that this option only available as a Factory Installable Option.

Step 1: Base Configuration (choose one of the following configurable models)

|        |  |            |
|--------|--|------------|
| Models | DL320G6 CTO (Configure to Order) Chassis   | 505768-B21 |
|        | Includes:  |            |
|        | Embedded NC326i Dual Port Gigabit Server Adapter   |            |
|        | 1 full length PCI Express x16 slot and 1 half length low profile PCI Express x4 slot   |            |
|        | Integrated Lights-Out 2 (ProLiant Onboard Administrator powered by Integrated Lights-Out 2) embedded (shared NIC functionality standard) |            |
|        | HP Smart Array B110i SATA RAID Controller (RAID 0/1/0+1)   |            |
|        | Rack (1U) form factor, (1.70 in/4.32 cm)   |            |
|        | Fixed, mounting rails  |            |

Step 2: Choose Required Options (only one of the following from each list unless other noted)

|            |  |            |
|------------|--|------------|
| Processors | Quad-Core Processors   |            |
|            | Intel® Xeon® Processor E5504 (2.00 GHz, 4MB L3 Cache, 80W, DDR3-800), FIO  | 512058-L21 |
|            | Intel® Xeon® Processor E5506 (2.13 GHz, 4MB L3 Cache, 80W, DDR3-800), FIO  | 512059-L21 |
|            | Intel® Xeon® Processor E5520 (2.26 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2), FIO  | 512060-L21 |
|            | Intel® Xeon® Processor E5530 (2.40 GHz, 8MB L3 Cache, 80W, DDR3 1066, HT, Turbo 1/1/2/2), FIO  | 512061-L21 |
|            | Intel® Xeon® Processor E5540 (2.53 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2), FIO  | 512062-L21 |
|            | Intel® Xeon® Processor L5506 (2.13 GHz, 4MB L3 Cache, 60W, DDR3-800), FIO  | 512063-L21 |
|            | Intel® Xeon® Processor L5520 (2.26 GHz, 8MB L3 Cache, 60W, DDR3-1066, HT, Turbo 1/1/2/2), FIO  | 512064-L21 |
|            | Intel® Xeon® Processor W3520 (2.63GHz, 8MB L3 Cache, 130W, DDR3-1066, HT, Turbo 1/1/1/2), FIO  | 519748-L21 |
|            | Intel® Xeon® Processor W3540 (2.93GHz, 8MB L3 Cache, 130W, DDR3-1066, HT, Turbo 1/1/1/2), FIO  | 519749-L21 |
|            | Dual-Core Processors   |            |
|            | Intel® Xeon® Processor E5502 (1.86 GHz, 4MB L3 Cache, 80W, DDR3-800), FIO  | 512057-L21 |
| Drive Cage | HP 8SFF HDD Cage & Bkpln G6 FIO  | 515938-B21 |
|            | NOTE: This cage requires the P410 SAS array controller as a Primary Controller (See Step 3 below if P/N 515938-B21 is selected).       |            |
|            | HP 4LFF HDD Hot Plug Bkpln G6 Kit FIO  | 570184-B21 |
|            | NOTE: This cage requires the P212 or P410 SAS array controller as a Primary Controller (See Step below if P/N 570184-B21 is selected). |            |

Configuration Information - Factory Integrated Models

|              |  |            |
|--------------|--|------------|
| Power Supply | DL320G6 400W Power Supply FIO Kit  | 515739-B21 |
|              | DL320G6 460W PL Power Supply FIO Kit   | 515740-B21 |
|              | DL320G6 500W NHP Power Supply FIO Kit  | 537150-B21 |
|              | HP 400W 1U G6 RPS Option Kit   | 532092-B21 |
| Memory       | Registered DIMMs (RDIMMs)  |            |
|              | HP 2GB 2Rx8 PC3-10600R-9   | 500656-B21 |
|              | HP 4GB 2Rx4 PC3-10600R-9 Kit   | 500658-B21 |
|              | HP 8GB 2Rx4 PC3-10600R-9 Kit   | 500662-B21 |
|              | HP 8GB 2Rx4 PC3-8500R-7 Kit  | 516423-B21 |
|              | Unbuffered with ECC DIMMs (UDIMMs)   |            |
|              | HP 1GB 1Rx8 PC3-10600E-9 Kit   | 500668-B21 |
|              | HP 2GB 2Rx8 PC3-10600E-9 Kit   | 500670-B21 |
|              | NOTE: Depending on the memory configuration and processor model the memory speed may run at 1066MHz or 800MHz. See the Online Memory Configuration Tool for details: <a href="http://www.hp.com/go/ddr3memory-configurator">http://www.hp.com/go/ddr3memory-configurator</a> . |            |
|              | NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <a href="http://www.hp.com/go/proliant-energy-efficient">www.hp.com/go/proliant-energy-efficient</a> .  |            |

Step 3: Choose Additional Factory Integratable Options (only one of the following from list unless otherwise noted)

|             |  |            |
|-------------|--|------------|
| SAS HBAs    | HP SC08Ge Host Bus Adapter   | 488765-B21 |
|             | NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS.  |            |
|             | HP SC11Xe Host Bus Adapter   | 412911-B21 |
|             | NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS.  |            |
| Controllers | NOTE: Any factory integrated SAS HBA purchase automatically includes the HP HBA SAS-SATA 4x 1 LN Cable Kit (452130-B21)                                |            |
|             | HP Smart Array P212/256 MB w/ Battery FIO  | 491191-B21 |
|             | HP Smart Array P212/256MB Controller   | 462834-B21 |
|             | HP Smart Array P212/Zero Memory (ZM) Controller  | 462828-B21 |
|             | HP Smart Array P410/Zero Memory FIO Controller   | 462860-B21 |
|             | NOTE: May be selected if P/N 515938-B21 selected in Step 2 above.  |            |
|             | HP Smart Array P410/256MB Controller   | 462862-B21 |
|             | NOTE: May be selected if P/N 515938-B21 selected in Step 2 above.  |            |
|             | HP Smart Array P410/256 MB w/Battery FIO   | 491195-B21 |
|             | NOTE: May be selected if P/N 515938-B21 selected in Step 2 above.  |            |
|             | HP Smart Array P410/512MB with BBWC  | 462864-B21 |
|             | NOTE: May be selected if P/N 515938-B21 selected in Step 2 above.  |            |
|             | HP Smart Array P411/256MB Controller   | 462830-B21 |
|             | HP Smart Array P411/256 MB w/ Battery FIO  | 491193-B21 |
|             | HP Smart Array P411/512MB BBWC   | 462832-B21 |
|             | NOTE: Any factory integrated Smart Array Controller purchase automatically includes the HP MS HP CA MiniSAS to MiniSAS 33" Cable Kit (P/N 496014-B21). |            |

## Configuration Information - Factory Integrated Models

### Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.



Core Options

NOTE: Some options may not be factory integratable. Contact your local sales representative for additional information.

|   |   |            |
|---|---|------------|
| Memory  | Registered DIMMs (RDIMMs)   |            |
|   | HP 2GB 2Rx8 PC3-10600R-9 Kit  | 500656-B21 |
|   | HP 4GB 2Rx4 PC3-10600R-9 Kit  | 500658-B21 |
|   | HP 4GB 4Rx8 PC3-8500R-7 LP Kit  | 500660-B21 |
|   | HP 8GB 2Rx4 PC3-10600R-9 Kit  | 500662-B21 |
|   | HP 8GB 2Rx4 PC3-8500R-7 Kit   | 516423-B21 |
|   | Unbuffered with ECC DIMMs (UDIMMs)  |            |
|   | HP 1GB 1Rx8 PC3-10600E-9 Kit  | 500668-B21 |
|   | HP 2GB 2Rx8 PC3-10600E-9 Kit  | 500670-B21 |
|   | NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: <a href="http://www.hp.com/go/ddr3memory-configurator">www.hp.com/go/ddr3memory-configurator</a> . |            |
| NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <a href="http://www.hp.com/go/proliant-energy-efficient">www.hp.com/go/proliant-energy-efficient</a> . |   |            |

|                |                                     |            |
|----------------|-------------------------------------|------------|
| Optical Drives | HP 9.5mm SATA DVD-ROM Optical Drive | 481045-B21 |
|                | HP 9.5mm SATA DVD RW Optical Drive  | 481047-B21 |

|             |   |            |
|-------------|---|------------|
| Hard Drives | NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components. |            |
|             | NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.   |            |
|             | SAS Hot Plug SFF Enterprise (ENT) Drives  |            |
|             | HP 300GB 6G SAS 10K SFF DP ENT HDD  | 507127-B21 |
|             | HP 300GB 3G SAS 10K SFF DP ENT HDD  | 492620-B21 |
|             | HP 146GB 6G SAS 15K SFF DP ENT HDD  | 512547-B21 |
|             | HP 146GB 3G SAS 15K SFF DP ENT HDD  | 504062-B21 |
|             | HP 146GB 6G SAS 10K SFF DP ENT HDD  | 507125-B21 |
|             | HP 146GB 3G SAS 10K SFF DP ENT HDD  | 418367-B21 |
|             | HP 72GB 6G SAS 15K SFF DP ENT HDD   | 512545-B21 |
|             | HP 72GB 3G SAS 15K SFF DP ENT HDD   | 418371-B21 |
|             | HP 72GB 3G SAS 10K SFF DP ENT HDD   | 384842-B21 |
|             | SAS Hot Plug 3.5" Enterprise (ENT) Drives   |            |
|             | HP 600GB 6G SAS 15K 3.5" DP ENT HDD   | 516828-B21 |
|             | HP 450GB 6G SAS 15K 3.5" DP ENT HDD   | 516816-B21 |
|             | HP 450GB 3G SAS 15K 3.5" DP ENT HDD   | 454232-B21 |
|             | HP 300GB 6G SAS 15K 3.5" DP ENT HDD   | 516814-B21 |
|             | HP 400GB 3G SAS 10K 3.5" DP ENT HDD   | 459508-B21 |
|             | HP 300GB 3G SAS 15K 3.5" DP ENT HDD   | 416127-B21 |
|             | HP 146GB 3G SAS 15K 3.5" DP ENT HDD   | 384854-B21 |



Core Options

|  |            |
|--|------------|
| HP 72GB 3G SAS 15K 3.5" DP ENT HDD     | 384852-B21 |
| SAS Hot Plug SFF Midline (MDL) Drives  |            |
| 500GB 6G SAS 7.2K 2.5in DP MDL HDD     | 507610-B21 |
| SAS Hot Plug 3.5" Midline (MDL) Drives |            |
| HP 1TB 3G SAS 7.2K 3.5" DP MDL HDD     | 461137-B21 |
| HP 750GB 3G SAS 7.2K 3.5" DP MDL HDD   | 461135-B21 |

NOTE: SAS Hard Drives are only supported with optional SAS HBA or RAID cards.

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/12244\\_div/12244\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html)  
(Worldwide)

|   |            |
|---|------------|
| SATA Hot Plug SFF Midline (MDL) Drives  |            |
| HP 500GB 3G SATA 7.2K 2.5in MDL HDD     | 507750-B21 |
| HP 160GB 3G SATA 7.2K 2.5in MDL HDD     | 530888-B21 |
| SATA Hot Plug 3.5" Midline (MDL) Drives |            |
| HP 1TB 3G SATA 7.2K 3.5" MDL HDD        | 454146-B21 |
| HP 750GB 3G SATA 7.2K 3.5" MDL HDD      | 458930-B21 |
| HP 500GB 3G SATA 7.2K 3.5" MDL HDD      | 458928-B21 |
| HP 250GB 3G SATA 7.2K 3.5" MDL HDD      | 458926-B21 |
| SATA Hot Plug 3.5" Entry (ETY) Drives   |            |
| HP 160GB 3G SATA 7.2K 3.5" ETY HDD      | 458945-B21 |
| SATA Hot Plug SFF Entry (ETY) Drives    |            |
| HP 250GB 3G SATA 5.4K SFF ETY HDD       | 460355-B21 |
| HP 120GB 1.5G SATA 5.4K SFF ETY HDD     | 458924-B21 |

NOTE: SATA hard drives have a 1-year warranty. Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13021\\_div/13021\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html)  
(Worldwide)

|   |            |
|---|------------|
| SATA Hot Plug Midline (MDL) Solid State Drives      |            |
| HP 60GB 3G SATA 2.5in MDL 1y Wty SSD                | 572071-B21 |
| HP 120GB 3G SATA 3.5in MDL 1y Wty SSD               | 572073-B21 |
| SATA Hot Plug 3.5" Midline (MDL) Solid State Drives |            |
| HP 60GB 3G SATA 2.5in MDL 1y Wty SSD                | 570761-B21 |
| HP 120GB 3G SATA 3.5in MDL 1y Wty SSD               | 570763-B21 |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13415\\_div/13415\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13415_div/13415_div.html)  
(Worldwide)

## Core Options

|                   |   |            |
|-------------------|---|------------|
| Communications    | Gigabit Ethernet Adapters   |            |
|                   | HP NC112T PCIe Gigabit Server Adapter   | 503746-B21 |
|                   | HP NC360T PCI Express Dual Port Gigabit Server Adapter  | 412648-B21 |
|                   | HP NC364T PCI Express Quad Port Gigabit Server Adapter  | 435508-B21 |
|                   | HP NC373F PCI Express Multifunction Gigabit Server Adapter  | 394793-B21 |
|                   | HP NC373T PCI Express Multifunction Gigabit Server Adapter  | 394791-B21 |
|                   | HP NC382T PCI Express Dual Port Multifunction Gigabit Server Adapter  | 458492-B21 |
|                   | 10 Gigabit Ethernet Adapters  |            |
|                   | HP NC522SFP Dual Port 10GbE Server Adapter  | 468332-B21 |
|                   | NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each NC522SFP adapter.   |            |
|                   | NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.                   |            |
|                   | NOTE: Please see the QuickSpecs for Technical Specifications and additional information: <a href="http://www.hp.com/go/ProLiantNICs">www.hp.com/go/ProLiantNICs</a> . |            |
|                   |   |            |
| Riser Kit Options | HP 1U PCI-X Riser Option Kit  | 516230-B21 |

Additional Options

|  |   |            |
|--|---|------------|
| HP Insight Control (ICE) suites, Integrated Lights-Out Advanced, Insight Rapid Deployment software | HP Insight Control suite (ICE) HP Insight Control suite, No Media 1-Server License including 1 year of 24x7 Technical Support and Updates<br>NOTE: This part number can be purchased as a single license or as multiple licenses with a single activation key. Customer will receive a license entitlement certificate via e-mail. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service. Only available directly from HP and select resellers in the Americas region.  | 452148-B22 |
|  | HP Insight Control Management Software Media Kit<br>NOTE: Insight Software DVD media without licenses. Contains HP Systems Insight Manager and Insight software products and components licensed by the Insight Control suite. Uses an integrated installer to perform quick and accurate software installation and updates.<br>NOTE: For additional License Kits, including electronic licensing options, please see the QuickSpecs at:<br><a href="http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html">http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html</a>   | 436222-B21 |
|  | HP Insight Control suite for Linux (ICE-LX)<br>HP Insight Control Environment for Linux, Media pack (DVD) - No licenses included<br>NOTE: This optional Media pack DVD contains the ISO image for HP Insight Control suite for Linux, HP System Insight Manager, HP Insight Power Manager, HP Insight Virtual Machine Manager, and an integrated installer. Servers must be acquired separately.<br>NOTE: This Media pack is optional because the latest ISO image and latest updates may be downloaded at no cost from: <a href="http://www.hp.com/go/ice-linux">http://www.hp.com/go/ice-linux</a> (click on Download button).  | 464422-B22 |
|  | HP Insight Control Environment for Linux, No Media, 1-Server license, including one year of 24x7 Technical Support and Updates<br>NOTE: This part number can be used to purchase one (1) license with a single activation key. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.<br>NOTE: One certificate is shipped for each license.<br>NOTE: For additional License Kits, including electronic licensing options, please see the QuickSpecs at:<br><a href="http://h18000.www1.hp.com/products/quickspecs/13019_div/13019_div.html">http://h18000.www1.hp.com/products/quickspecs/13019_div/13019_div.html</a> | 464423-B22 |
|  | HP Integrated Lights-Out Advanced<br>HP Integrated Lights-Out Advanced, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates<br>NOTE: This license allows 1 server to be deployed and managed via HP iLO Advanced. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.<br>NOTE: For additional license kits, including electronic delivery options, please see the ProLiant OA/iLO QuickSpecs at:<br><a href="http://h18000.www1.hp.com/products/quickspecs/12362_div/12362_div.html">http://h18000.www1.hp.com/products/quickspecs/12362_div/12362_div.html</a>                                 | 512485-B21 |
|  | HP Insight Rapid Deployment software  |            |



Additional Options

HP Insight Rapid Deployment software No Media 1-Server License, including 1 year of 24x7 Technical Support and Updates 452151-B21

NOTE: This license allows 1 server to be deployed and managed via RDP. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

NOTE: For additional license kits, including electronic delivery options, please see the RDP QuickSpecs at:  
[http://h18000.www1.hp.com/products/quickspecs/11053\\_div/11053\\_div.html](http://h18000.www1.hp.com/products/quickspecs/11053_div/11053_div.html)

Port Options HP DL320G6 iLO2 PORT OPT KIT 514206-B21

Security HP Trusted Platform Module Option Kit 488069-B21

Storage Controllers SAS Controllers

NOTE: When using the following Smart Array Controllers the HP MS HP CA MiniSAS to MiniSAS 33" Cable Kit (P/N 496014-B21) is required.

Smart Array P212 Controller

HP Smart Array P212/Zero Memory Controller 462828-B21

HP Smart Array P212/256 MB Controller 462834-B21

Smart Array P410 Controller

HP Smart Array P410/256 MB Controller 462862-B21

HP Smart Array P410/512 MB with BBWC Controller 462864-B21

Smart Array P411 Controller

HP Smart Array P411/256MB Controller 482830-B21

HP Smart Array P411/512MB Battery Backed Write Cache 462832-B21

NOTE: Please see the following QuickSpecs for Technical Specifications and additional information:  
[http://h18000.www1.hp.com/products/quickspecs/13203\\_div/13203\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13203_div/13203_div.html)  
(Smart Array P212 Controller)  
[http://h18000.www1.hp.com/products/quickspecs/13201\\_div/13201\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13201_div/13201_div.html)  
(Smart Array P410 Controller)  
[http://h18000.www1.hp.com/products/quickspecs/13202\\_div/13202\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13202_div/13202_div.html)  
(Smart Array P411 Controller)

Optional Upgrades

256 MB Cache Module 462968-B21

NOTE: Supported on HP Smart Array P212 Controller only.

512MB BBWC 462967-B21

NOTE: Supported on HP Smart Array P410 Controller and HP Smart Array P411 Controller only.

Battery Kit upgrade 462969-B21

NOTE: To enable BBWC on the 256MB cache.  
NOTE: Supported on HP Smart Array P212 Controller, HP Smart Array P410 Controller, and HP Smart Array P411 Controller only.

SCSI HBA

HP SC11Xe Host Bus Adapter 412911-B21



Additional Options

NOTE: Please see the following QuickSpecs for Technical Specifications and additional information:  
[http://h18000.www1.hp.com/products/quickspecs/12566\\_div/12566\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html)  
(SC11Xe HBA)

Tape Drives

NOTE: For the complete listing of Tape Drive offerings, please see:  
<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

USB Rack-Mount Tape Solutions

HP StorageWorks 1U USB Rack-Mount Kit with one DAT 160 USB Tape Drive AG703A  
NOTE: Pre-configured with one DAT 160 USB tape drive.

SAS Rack-Mount Tape Solutions

NOTE: HP P212 Smart Array Controller SAS (462828-B21) is recommended for a dedicated HBA for SAS tape connection.

HP StorageWorks 1U SAS Rack-Mount Kit with one LTO-4 Ultrium 1760 EH946A  
NOTE: Pre-configured with one LTO-4 Ultrium 1760 SAS tape drive.

NOTE: For an up-to-date listing of the latest O/S and software support details for HP Ultrium tape drives, please visit: <http://www.hp.com/go/connect>.

Disk-Based Backup

HP StorageWorks RDX Removable Disk Backup System

HP StorageWorks RDX320 Internal AJ767A  
NOTE: Requires HP 1U USB rack mount kit (A8007A) to install into 19" rack.

HP StorageWorks RDX500 Internal AJ934A  
NOTE: Requires HP 1U USB rack mount kit (A8007A) to install into 19" rack.

NOTE: Please see the HP RDX QuickSpecs for additional information:  
[http://h18000.www1.hp.com/products/quickspecs/13036\\_div/13036\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13036_div/13036_div.html)

Tape Autoloaders

HP StorageWorks 1/8 G2 Tape Autoloader

NOTE: HP P212 Smart Array Controller SAS (462828-B21) is recommended for a dedicated HBA for SAS tape connection.

HP StorageWorks 1/8 G2 LTO-4 Ultrium 1760 SAS Tape Autoloader AK377A  
NOTE: Requires HP 1/8 G2 Tape Autoloader rack kit (AH166A) to install into 19" rack.

HP StorageWorks 1/8 G2 LTO-3 Ultrium 920 SAS Autoloader AH558A  
NOTE: Requires HP 1/8 G2 Tape Autoloader rack kit (AH166A) to install into 19" rack.

NOTE: Please see the Tape Autoloader QuickSpecs at:  
<http://www.hp.com/go/automation> for additional information.

Additional Options

|  |  |         |
|--|--|---------|
| Tape Libraries   | HP StorageWorks MSL2024 Tape Library   |         |
|  | HP StorageWorks MSL2024 1 LTO-4 Ultrium 1760 SAS Drive Library   | AK378A  |
|  | NOTE: HP P212 Smart Array Controller SAS (462828-B21) is recommended for a dedicated HBA for SAS tape connection.  |         |
|  | HP StorageWorks MSL2024 1 LTO-2 Ultrium 448 SCSI Drive Library   | AG116A  |
|  | NOTE: HP U320e SCSI HBA (AH627A) recommended MSL SCSI Tape Library connect.  |         |
|  | HP StorageWorks MSL4048 Tape Library   |         |
|  | HP StorageWorks MSL4048 2 LTO-4 Ultrium 1760 SAS Drive Library   | AK380A  |
|  | NOTE: HP P212 Smart Array Controller SAS (462828-B21) is recommended for a dedicated HBA for SAS tape connection.  |         |
|  | HP StorageWorks MSL4048 1 LTO-3 Ultrium 920 SAS Drive Library  | AH560A  |
|  | NOTE: HP P212 Smart Array Controller SAS (462828-B21) is recommended for a dedicated HBA for SAS tape connection.  |         |
| NOTE: Please reference the MSL Tape Library QuickSpecs at:<br><a href="http://www.hp.com/go/automation">http://www.hp.com/go/automation</a> for additional information. Please reference current compatibility information at: <a href="http://www.hp.com/go/ebs">http://www.hp.com/go/ebs</a> . |  |         |
| Backup & Recovery Software   | HP Data Protector Express  |         |
|  | NOTE: One base product is required: BB117BA, BB118BA or BB117BT. Delivered as a media kit and License to Use (LTU).  |         |
|  | HP Data Protector Express 4.0 SP1 Backup Server  | BB117BA |
|  | HP Data Protector Express 4.0 SP1 for Microsoft Small Business Server  | BB118BA |
|  | HP Data Protector Express Backup Server 4.0 SP1 Upgrade from Data Protector Express Single Server Edition  | BB117BT |
|  | NOTE: This part number allows registered owners of Data Protector Express Single Server Edition to acquire Data Protector Express at a reduced cost. The product received is exactly the same as when the Data Protector Express Backup Server (BB117BA) is ordered. |         |
|  | HP Data Protector Express options  |         |
|  | NOTE: These are added to one of the base products. Delivered as a License to Use (LTU).  |         |
|  | HP Data Protector Express 4.0 SP1 Network Server Agent   | BB121BA |
|  | HP Data Protector Express 4.0 SP1 Network Server Agent 3 Pack  | BB122BA |
|  | HP Data Protector Express 4.0 SP1 Application Online Agent   | BB125BA |
|  | HP Data Protector Express 4.0 SP1 Bare Metal Disaster Recovery Option  | BB128BA |
|  | HP Data Protector Express 4.0 SP1 D2Any2Any Option   | BB130BA |
|  | HP Data Protector Express 4.0 SP1 Drive Expansion Option   | BB133BA |
|  | NOTE: Please see <a href="http://www.hp.com/go/dataprotectorexpress">www.hp.com/go/dataprotectorexpress</a> for additional information:  |         |

Additional Options

|   |  |            |
|---|--|------------|
| HP StorageWorks<br>Modular Smart Array  | MSA SAN Storage Arrays<br>HP StorageWorks 60 Modular Smart Array   | 418408-B21 |
| NOTE: Please see the Modular Smart Array 60 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: <a href="http://h18000.www1.hp.com/products/quickspecs/12627_div/12627_div.html">http://h18000.www1.hp.com/products/quickspecs/12627_div/12627_div.html</a> (Worldwide) |  |            |
|   | HP StorageWorks 70 Modular Smart Array   | 418800-B21 |
| NOTE: Please see the Modular Smart Array 70 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: <a href="http://h18000.www1.hp.com/products/quickspecs/12652_div/12652_div.html">http://h18000.www1.hp.com/products/quickspecs/12652_div/12652_div.html</a> (Worldwide) |  |            |
| HP StorageWorks Fibre Channel HBAs  | NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see: <a href="http://h18006.www1.hp.com/storage/saninfrastructure/hba.html">http://h18006.www1.hp.com/storage/saninfrastructure/hba.html</a> |            |
|   | Brocade Fibre Channel HBAs   |            |
|   | HP 81B PCIe 8Gb FC Single Port HBA   | AP769A     |
|   | HP 82B PCIe 8Gb FC Dual Port HBA   | AP770A     |
|   | HP 41B PCIe 4Gb FC Single Port HBA   | AP767A     |
|   | HP 42B PCIe 4Gb FC Dual Port HBA   | AP768A     |
|   | Emulex Fibre Channel HBAs  |            |
|   | HP StorageWorks 81E 8Gb SP PCIe FC HBA   | AJ762A     |
|   | HP StorageWorks 82E 8Gb Dual-port PCIe FC HBA  | AJ763A     |
|   | HP StorageWorks FC2142SR 4Gb PCIe HBA  | A8002A     |
|   | HP StorageWorks FC2242SR Dual Channel 4 Gb PCIe HBA  | A8003A     |
|   | HP StorageWorks FC2143 4Gb PCI-X 2.0 to-Fibre Channel HBA  | AD167A     |
|   | HP StorageWorks FC2243 Dual Channel 4Gb PCI-X 2.0 HBA  | AD168A     |
|   | QLogic Fibre Channel HBAs  |            |
|   | HP StorageWorks 81Q PCIe FC HBA  | AK344A     |
|   | HP StorageWorks 82Q 8Gb Dual Port PCIe FC HBA  | AJ764A     |
|   | HP StorageWorks FC1142SR 4Gb PCIe HBA  | AE311A     |
|   | HP StorageWorks FC1242SR Dual Channel 4 Gb PCIe HBA  | AE312A     |
|   | HP StorageWorks FC1143 4Gb PCI-X 2.0 HBA   | AB429A     |
|   | HP StorageWorks FC1243 Dual Channel 4Gb PCI-X 2.0 HBA  | AE369A     |



Additional Options

|                               |   |        |
|-------------------------------|---|--------|
| Uninterruptible Power Systems | HP Rack-mountable UPS   |        |
|                               | HP R1500 G2 UPS   |        |
|                               | HP, R1.5kVA UPS, 1U, NA   | AF419A |
|                               | HP, R1.5kVA UPS, 1U, INTL   | AF418A |
|                               | HP, R1.5kVA UPS, 1U, JPN/TW   | AF421A |
|                               | NOTE: Please see the QuickSpecs for additional information:<br><a href="http://h18000.www1.hp.com/products/quickspecs/12507_div/12507_div.html">http://h18000.www1.hp.com/products/quickspecs/12507_div/12507_div.html</a>                |        |
|                               | HP R3000 UPS  |        |
|                               | HP R3000 VA UPS, 2U, DTC, INTL  | AF414A |
|                               | HP R3000 VA UPS, 2U, Low Voltage L5-30, NA  | AF422A |
|                               | HP R3000 VA UPS, 2U, High Voltage L6-20, NA   | AF423A |
|                               | HP R3000 VA UPS, 2U, High Voltage L6-20, JPN  | AF424A |
|                               | HP R3000 VA UPS, 2U, Low Voltage L5-30, JPN   | AF425A |
|                               | NOTE: Please see the QuickSpecs for additional information:<br><a href="http://h18000.www1.hp.com/products/quickspecs/10671_div/10671_div.html">http://h18000.www1.hp.com/products/quickspecs/10671_div/10671_div.html</a>                |        |
|                               | HP R3000v Uninterruptible Power System  |        |
|                               | HP R3000v UPS   | AF444A |
|                               | NOTE: The R3000v is available in China and India only.  |        |
|                               | NOTE: Please see UPS QuickSpecs for additional information:<br><a href="http://h18000.www1.hp.com/products/quickspecs/13129_div/13129_div.html">http://h18000.www1.hp.com/products/quickspecs/13129_div/13129_div.html</a><br>(Worldwide) |        |
|                               | HP Rack-Mountable R5500 UPS   |        |
|                               | HP R5500 VA UPS, INTL   | AF416A |
|                               | HP R5500 VA UPS, NA/JPN   | AF426A |
|                               | NOTE: Please see the QuickSpecs for additional information:<br><a href="http://h18000.www1.hp.com/products/quickspecs/11871_div/11871_div.html">http://h18000.www1.hp.com/products/quickspecs/11871_div/11871_div.html</a><br>(Worldwide) |        |
|                               | NOTE: For additional information on HP Uninterruptable Power Systems please go to:<br><a href="http://www.hp.com/servers/rackups">www.hp.com/servers/rackups</a> .  |        |

|                    |   |            |
|--------------------|---|------------|
| USB and SD Options | USB 1.44-MB External Diskette Drive (Carbonite)   | DC141B     |
|                    | HP USB-P/S2 Mouse   | DC369A     |
|                    | HP 1GB USB 2.0 Floppy Drive Key   | 442085-B21 |
|                    | HP 4GB SD Flash Media Kit   | 580387-B21 |
|                    | NOTE: Blank USB and SD media device is supported for use with VMware and Citrix. USB/SD media must be installed in the internal slot of the ProLiant server. Learn more at: <a href="http://www.hp.com/go/proliantvirtualization">http://www.hp.com/go/proliantvirtualization</a> . |            |

|          |  |            |
|----------|--|------------|
| Rack Kit | Rack Adapter Kit   | 332815-B21 |
|          | NOTE: This kit allows HP rack servers to fit in racks that are 24" wide. |            |

Additional Options

|                |  |            |
|----------------|--|------------|
| HP Rack Series | HP Rack 5000 Series (Graphite Metallic)  |            |
|                | HP 5642 Rack-Unassembled   | 358254-B21 |
|                | NOTE: Please see the QuickSpecs for additional information:<br><a href="http://h18000.www1.hp.com/products/quickspecs/12074_div/12074_div.html">http://h18000.www1.hp.com/products/quickspecs/12074_div/12074_div.html</a><br>(Worldwide)      |            |
|                | HP Rack 10000 G2 Series (Carbon/Graphite Metallic)   |            |
|                | 10642 G2 (42U) Rack Cabinet - Pallet   | AF001A     |
|                | 10642 G2 (42U) Rack Cabinet - Shock Pallet   | AF002A     |
|                | 10642 G2 (42U) Rack Cabinet - Crated   | AF003A     |
|                | 10642 G2 (42U) Rack Cabinet, with Extension - Shock Pallet   | AF004A     |
|                | 10636 G2 (36U) Rack Cabinet - Pallet   | AF011A     |
|                | 10636 G2 (36U) Rack Cabinet - Shock Pallet   | AF012A     |
|                | 10636 G2 (36U) Rack Cabinet - Crated   | AF013A     |
|                | 10636 G2 (36U) Rack Cabinet, with Extension - Shock Pallet   | AF014A     |
|                | 10622 G2 (22U) Rack Cabinet - Pallet   | AF021A     |
|                | 10622 G2 (22U) Rack Cabinet - Shock Pallet   | AF022A     |
|                | 10642 G2 (42U) Rack Cabinet 1200mm Deep - Shock Pallet   | AF034A     |
|                | 10642 G2 (42U) Rack Cabinet 1200mm Deep - Pallet   | AF038A     |
|                | 10842 G2 (42U) 800mm Wide Rack Cabinet - Pallet  | AF041A     |
|                | 10842 G2 (42U) 800mm Wide Rack Cabinet - Shock Pallet  | AF042A     |
|                | 10647 G2 (47U) Rack Cabinet - Pallet   | AF031A     |
|                | HP S10614 (14U) Rack Cabinet - Shock Pallet  | 292302-B22 |
|                | 10647 G2 (47U) Rack Cabinet 1200mm Deep - Shock Pallet   | AF044A     |
|                | NOTE: Due to handling and shipping requirements, AF044A is only orderable through HP Factory Express. It is not for direct sales. Customer site surveys are required before an order is approved. CTO orders may require additional lead time. |            |
|                | 10647 G2 (47U) Rack Cabinet 1200mm Deep - Pallet   | AF045A     |
|                | NOTE: It is mandatory to use a shock pallet when shipping racks with equipment installed.  |            |
|                | NOTE: xxxxxx-B22 (shock pallet) used to ship racks with equipment installed (by custom systems, VARs and Channels).  |            |
|                | NOTE: Please see the QuickSpecs for additional information:<br><a href="http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html">http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html</a><br>(Worldwide)      |            |
|                | NOTE: For additional information regarding Rack Cabinets, please see the following URL: <a href="http://www.hp.com/go/rackandpower">http://www.hp.com/go/rackandpower</a> .  |            |

|                 |  |        |
|-----------------|--|--------|
| HP Rack Options | Keyboards and Monitors                 |        |
|                 | TFT7600 Rackmount Keyboard Monitor, US | AG052A |
|                 | TFT7600 Rackmount Keyboard Monitor UK  | AG053A |
|                 | TFT7600 Rackmount Keyboard Monitor GR  | AG054A |
|                 | TFT7600 Rackmount Keyboard Monitor FR  | AG055A |
|                 | TFT7600 Rackmount Keyboard Monitor IT  | AG056A |
|                 | TFT7600 Rackmount Keyboard Monitor SP  | AG057A |
|                 |  |        |



Additional Options

|   |            |
|---|------------|
| TFT7600 Rackmount Keyboard Monitor DEN  | AG058A     |
| TFT7600 Rackmount Keyboard Monitor NOR  | AG059A     |
| TFT7600 Rackmount Keyboard Monitor SE/FI  | AG060A     |
| TFT7600 Rackmount Keyboard Monitor SWI  | AG061A     |
| TFT7600 Rackmount Keyboard Monitor PORT   | AG062A     |
| TFT7600 Rackmount Keyboard Monitor BEL  | AG063A     |
| TFT7600 Rackmount Keyboard Monitor JPN2   | AG064A     |
| TFT7600 Rackmount Keyboard Monitor RUS  | AG065A     |
| TFT7600 Rackmount Keyboard Monitor INTL   | AG066A     |
| 1 U Rackmount Keyboard with USB, US   | AG072A     |
| 1 U Rackmount Keyboard with USB, UK   | AG073A     |
| 1 U Rackmount Keyboard with USB, GR   | AG074A     |
| 1 U Rackmount Keyboard with USB, FR   | AG075A     |
| 1 U Rackmount Keyboard with USB, ITL  | AG076A     |
| 1 U Rackmount Keyboard with USB, SP   | AG077A     |
| 1 U Rackmount Keyboard with USB, DEN  | AG078A     |
| 1 U Rackmount Keyboard with USB, NOR  | AG079A     |
| 1 U Rackmount Keyboard with USB, SE/FI  | AG080A     |
| 1 U Rackmount Keyboard with USB, SWI  | AG081A     |
| 1 U Rackmount Keyboard with USB, PORT   | AG082A     |
| 1 U Rackmount Keyboard with USB, BEL  | AG083A     |
| 1 U Rackmount Keyboard with USB, JPN2   | AG084A     |
| 1 U Rackmount Keyboard with USB, RUS  | AG085A     |
| 1 U Rackmount Keyboard with USB, INTL   | AG086A     |
| HP KVM Switch Options   |            |
| 2 x 1 x 16 IP Console Switch with Virtual Media   | AF601A     |
| 4 x 1 x 16 IP Console Switch with Virtual Media   | AF602A     |
| 2 x 16 Server Console Switch with Virtual Media   | AF600A     |
| PS/2 Virtual Media Interface Adapter, 1 pack  | AF604A     |
| NOTE: Requires PS/2 and one USB port on server.   |            |
| HP Server console switch 0x2x8  | AF616A     |
| HP Server console switch 0x2x16   | AF617A     |
| PS/2 Interface Adapter, 1 pack  | 262588-B21 |
| PS/2 Interface Adapter, 8 pack  | 262587-B21 |
| NOTE: Cat5e cables are required to connect Interface Adapters to Console Switches.<br>Cat5e cables can be found at the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .                                       |            |
| HP 1 x 4 Console Switch (ALL)   | AF611A     |
| PS2 Server Console Cable, 6 ft, 2 pack  | AF612A     |
| USB Server Console Cable, 6 ft, 2 pack  | AF613A     |
| NOTE: Required for supporting USB peripherals.  |            |
| NOTE: For additional information regarding KVM switches, Serial Console servers,<br>rack mount monitors, keyboards and all related options please see the following URL:<br><a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> . |            |

Additional Options

|  |  |        |
|--|--|--------|
| HP Serial Console Server Options             |  |        |
| HP 16 Port Serial Console Server (worldwide) |  | AF101A |
| HP 48 Port Serial Console Server (worldwide) |  | AF102A |
| Serial Adapter, RJ45-DB9 DCE Female, 1 Pack  |  | AF103A |
| Serial Adapter, RJ45-DB9 DCE Female, 8 Pack  |  | AF110A |

NOTE: Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: <http://www.hp.com/go/kvm>.

NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <http://www.hp.com/go/kvm>.

|  |  |        |
|--|--|--------|
| Service and Support Offerings<br>(HP Care Pack Services) | Hardware Services On-site Service  |        |
|  | Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic  | U4479E |
|  | 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic  | U4480E |
|  | 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic  | U4481E |
|  | 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic  | U4482E |
|  | Installation & Start-up Services   |        |
|  | Hardware Installation, Electronic  | U4490E |
|  | Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays, Electronic | U4491E |
|  | Support Plus   |        |
|  | Onsite HW support, 8am-9pm, M-F, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays, Electronic                         | U4492E |
|  | Support Plus 24  |        |
|  | Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic  | U4493E |
|  | Onsite HW support 24x7, 4hr response and SuSE Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic.  | U6309E |
|  | Onsite HW support 24x7, 4hr response and Red Hat ES Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic.                                      | U8331E |

NOTE: For more information, customer/resellers can contact: <http://www.hp.com/hps/>

Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

DDR3 memory population guidelines

NOTE: Charts do not represent all possible memory configurations.

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool:  
[www.hp.com/go/ddr3memory-configurator](http://www.hp.com/go/ddr3memory-configurator)

Some DIMM installation guidelines are summarized below:

- For servers with nine (9) memory slots;
- There are three (3) channels per processor, per server.
- There are three (3) DIMM slots for each memory channel; nine (9) total slots.
- Memory channel 1 consists of the three (3) DIMMs that are closest to the processor.
- Memory channel 3 consists of the three (3) DIMMs that are furthest from the processor.
- DIMM slots that are white should be populated first.
- Do not mix Unbuffered memory (UDIMMs) with Registered memory (RDIMMs).
- To maximize performance, balance the total memory capacity between all installed processors.
- It is not required, but it is recommended to load the channels similarly if possible.
- You can only have up to eight (8) ranks installed per channel.
- You can only install two quad-rank DIMMs per channel.
- You can only install two UDIMMs per channel; if available, the third slot in the channel must remain empty.
- Populate DIMMs from heaviest load (quad-rank) to lightest load (single-rank) within a channel.
- Heaviest load (DIMM with most ranks) within a channel goes furthest from the chipset.
- For memory mirroring mode, channel 3 must be unpopulated. Channels 1 and 2 are populated identically.
- For lock-step mode, channel 3 must be unpopulated. DIMMs in channels 1 and 2 will be installed in pairs. The paired slots will be 1,4; 2,5; 3,6 on a 3DPC system or 1,4; 2,5; on a 2DPC system.
- No mixing DIMM voltage; all DIMMs must be the same voltage.

DDR3 DIMM slot/capacity/populated speed table

| DIMM Type ->                          | Registered (RDIMMs) |      |      |      |                | Unbuffered with ECC (UDIMMs) |                |
|---------------------------------------|---------------------|------|------|------|----------------|------------------------------|----------------|
| DIMM Rank ->                          | Dual Rank (2R)      |      |      |      | Quad Rank (4R) | Single Rank                  | Dual Rank (2R) |
| DIMM Capacity ->                      | 2GB                 | 4GB  | 8GB  | 8GB  | 4GB            | 1GB                          | 2GB            |
| DIMM Native Speed (MHz) ->            | 1333                | 1333 | 1066 | 1333 | 1066           | 1333                         | 1333           |
|                                       |                     |      |      |      |                |                              |                |
| SLOTS THAT CAN BE POPULATED           |                     |      |      |      |                |                              |                |
| 9 slot servers                        | 9                   | 9    | 9    | 9    | 6              | 6                            | 6              |
|                                       |                     |      |      |      |                |                              |                |
| MAXIMUM CAPACITY (GB)                 |                     |      |      |      |                |                              |                |
| 9 slot servers                        | 18                  | 36   | 72   | 72   | 24             | 6                            | 12             |
|                                       |                     |      |      |      |                |                              |                |
| POPULATED DIMM SPEED (MHz)            |                     |      |      |      |                |                              |                |
| 1 DIMM Per Channel                    | 1333                | 1333 | 1066 | 1333 | 1066           | 1333                         | 1333           |
| 2 DIMM Per Channel                    | 1066                | 1066 | 1066 | 1066 | 800            | 1066                         | 1066           |
| 3 DIMM Per Channel                    | 800                 | 800  | 800  | 800  | *              | *                            | *              |
| * - not supported by HP at this time. |                     |      |      |      |                |                              |                |

NOTES:

- Mixing DIMM speeds is allowed, but the system processor speed rules always override the DIMM capabilities.



Memory

- If you do mix DIMM speeds, the memory bus will default to the minimum clock rate of all DIMMs in the system - even if the slower DIMM is on the other processor.
- If you install 1x 1066MHz DIMM in channel 1 and 1x 1333MHz DIMM in channel 2, you still run at 1066MHz.
- If you install 1x 1066MHz DIMM in channel 1 and 5x 1333MHz DIMMs with 1 DIMM Per Channel (DPC) in each of the other channels, you run at 1066MHz.
- If you install 3DPC in one channel (if applicable) and 1DPC in all other channels, you run at 800MHz.
- 95 Watt CPU's are required for 1333MHz DIMM speeds. All other CPU's are capable of up to 1066MHz.
- References to the above MHz speeds are for the various speeds of DDR3 DIMMs; 1333 refers to DDR3-1333, etc.

DIMM slot and configuration diagrams  
Basic memory slot & population diagram

- Population order; start with "A" first, "B" second, "C" third, etc.

| 9 DIMM SLOTS |        |                  |
|--------------|--------|------------------|
|              | CPU1   |                  |
|              | slot # | population order |
| Chnl 1       | 1      | G                |
|              | 2      | D                |
|              | 3      | A                |
| Chnl 2       | 4      | H                |
|              | 5      | E                |
|              | 6      | B                |
| Chnl 3       | 7      | I                |
|              | 8      | F                |
|              | 9      | C                |

Standard memory configuration

- 6GB, consisting of three (3) 2GB dual-rank PC3-10600 RDIMMs

|        | CPU1   |                  |
|--------|--------|------------------|
|        | slot # | population order |
| Chnl 1 | 1      | G; empty         |
|        | 2      | D; empty         |
|        | 3      | A; 2GB DIMM      |
| Chnl 2 | 4      | H; empty         |
|        | 5      | E; empty         |
|        | 6      | B; 2GB DIMM      |
| Chnl 3 | 7      | I; empty         |
|        | 8      | F; empty         |
|        | 9      | C; 2GB DIMM      |

Memory

Standard memory plus optional memory

- 54GB, consisting of three (3) 2GB RDIMMs plus six (6) 8GB RDIMMs
- 3x 2GB dual-rank PC3-10600 RDIMMs
- 6x 8GB dual-rank PC3-10600 RDIMMs

|        | CPU1   |                  |
|--------|--------|------------------|
|        | slot # | population order |
| Chnl 1 | 1      | G; 8GB DIMM      |
|        | 2      | D; 8GB DIMM      |
|        | 3      | A; 2GB DIMM      |
| Chnl 2 | 4      | H; 8GB DIMM      |
|        | 5      | E; 8GB DIMM      |
|        | 6      | B; 2GB DIMM      |
| Chnl 3 | 7      | I; 8GB DIMM      |
|        | 8      | F; 8GB DIMM      |
|        | 9      | C; 2GB DIMM      |

Standard memory replaced with optional memory  
RDIMM maximum configuration

- 72GB, consisting of nine (9) 8GB dual-rank PC3-10600 RDIMMs

|        | CPU1   |                  |
|--------|--------|------------------|
|        | slot # | population order |
| Chnl 1 | 1      | G; 8GB DIMM      |
|        | 2      | D; 8GB DIMM      |
|        | 3      | A; 8GB DIMM      |
| Chnl 2 | 4      | H; 8GB DIMM      |
|        | 5      | E; 8GB DIMM      |
|        | 6      | B; 8GB DIMM      |
| Chnl 3 | 7      | I; 8GB DIMM      |
|        | 8      | F; 8GB DIMM      |
|        | 9      | C; 8GB DIMM      |

UDIMM maximum configuration (2 UDIMMs per Channel limit)

- 12GB, consisting of six (6) 2GB dual-rank PC3-10600 UDIMMs

Memory

|        | CPU1   |             |
|--------|--------|-------------|
|        | slot # |             |
| Chnl 1 | 1      | G; empty    |
|        | 2      | D; 2GB DIMM |
|        | 3      | A; 2GB DIMM |
| Chnl 2 | 4      | H; empty    |
|        | 5      | E; 2GB DIMM |
|        | 6      | B; 2GB DIMM |
| Chnl 3 | 7      | I; empty    |
|        | 8      | F; 2GB DIMM |
|        | 9      | C; 2GB DIMM |

NOTES;

Memory configurations above do not apply to "Factory Integrated Models".

Capacity references are rounded to the common Gigabyte values.

- 1GB = 1024MB
- 2GB = 2048MB
- 4GB = 4096MB
- 8GB = 8192MB

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool:

[www.hp.com/go/ddr3memory-configurator](http://www.hp.com/go/ddr3memory-configurator)



Storage

1- 4    Four SATA or SAS drive bays



A    Optical Drive Bay: Optional 9.5mm DVD-ROM, or DVD-RW drive

Drive Support

|  | Quantity Supported | Position Supported | Controller                  |
|--|--------------------|--------------------|-----------------------------|
| Removable Media                              |                    |                    |                             |
| All Models:<br>9.5mm DVD-ROM or DVD-RW Drive | Up to 1            | A                  | HP embedded SATA Controller |

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF Enterprise (ENT) Drives

|                 | Quantity Supported | Position Supported | Controller                                      |
|-----------------|--------------------|--------------------|---|
| 300GB 6G 10K DP | Up to 8            | 1-8                | HP Smart Array P410/256 MB Controller           |
| 300GB 3G 10K DP |                    |                    | HP Smart Array P410/512 MB with BBWC Controller |
| 146GB 6G 15K DP |                    |                    |   |
| 146GB 3G 15K DP |                    |                    |   |
| 146GB 6G 10K DP |                    |                    |   |
| 146GB 3G 10K DP |                    |                    |   |
| 72GB 6G 15K DP  |                    |                    |   |
| 72GB 3G 15K DP  |                    |                    |   |
| 72GB 3G 10K DP  |                    |                    |   |

SAS Hot Plug 3.5" Enterprise (ENT) Drives

|                 | Quantity Supported | Position Supported | Controller  |
|-----------------|--------------------|--------------------|---|
| 600GB 6G 15K DP | Up to 4            | 1-4                | HP Smart Array B110i SATA RAID Controller with RAID 0/1/1+0 support |
| 450GB 6G 15K DP |                    |                    | HP Smart Array P212/Zero Memory Controller                          |
| 450GB 3G 15K DP |                    |                    | HP Smart Array P212/256 MB Controller                               |
| 400GB 3G 10K DP |                    |                    | HP Smart Array P410/256 MB Controller                               |
| 300GB 6G 15K DP |                    |                    | HP Smart Array P410/512 MB with BBWC Controller                     |
| 300GB 3G 15K DP |                    |                    |   |



Storage

146GB 3G 15K DP  
72GB 3G 15K DP

SAS Hot Plug SFF Midline (MDL) Drives

|                   | Quantity<br>Supported | Position<br>Supported | Controller   |
|-------------------|-----------------------|-----------------------|--|
| 500GB 7.2K SFF DP | Up to 8               | 1-8                   | HP Smart Array P410/256 MB Controller<br>HP Smart Array P410/512 MB with BBWC Controller |

SAS Hot Plug 3.5" Midline (MDL) Drives

|                   | Quantity<br>Supported | Position<br>Supported | Controller  |
|-------------------|-----------------------|-----------------------|---|
| 1TB SAS 7.2K DP   | Up to 4               | 1-4                   | HP Smart Array P212/Zero Memory Controller  |
| 750GB SAS 7.2K DP |                       |                       | HP Smart Array P212/256 MB Controller<br>HP Smart Array P410/256 MB Controller<br>HP Smart Array P410/512 MB with BBWC Controller |

SATA Hot Plug 3.5" Midline (MDL) Drives

|                    | Quantity<br>Supported | Position<br>Supported | Controller   |
|--------------------|-----------------------|-----------------------|--|
| 1TB 3G SATA 7.2K   | Up to 4               | 1-4                   | HP Smart Array B110i SATA RAID Controller with RAID 0/1/1+0 support                      |
| 750GB 3G SATA 7.2K |                       |                       | HP Smart Array P212/Zero Memory Controller   |
| 500GB 3G SATA 7.2K |                       |                       | HP Smart Array P212/256 MB Controller  |
| 250GB 3G SATA 7.2K |                       |                       | HP Smart Array P410/256 MB Controller<br>HP Smart Array P410/512 MB with BBWC Controller |

SATA Hot Plug SFF Entry (ETY) Drives

|                      | Quantity<br>Supported | Position<br>Supported | Controller                                      |
|----------------------|-----------------------|-----------------------|---|
| 250GB 3G SATA 5.4K   | Up to 8               | 1-8                   | HP Smart Array P410/256 MB Controller           |
| 120GB 1.5G SATA 5.4K |                       |                       | HP Smart Array P410/512 MB with BBWC Controller |

SATA Hot Plug SFF Midline (MDL) Drives

|                    | Quantity<br>Supported | Position<br>Supported | Controller                                      |
|--------------------|-----------------------|-----------------------|---|
| 500GB 3G SATA 7.2K | Up to 8               | 1-8                   | HP Smart Array P410/256 MB Controller           |
| 160GB 3G SATA 7.2K |                       |                       | HP Smart Array P410/512 MB with BBWC Controller |

SATA Hot Plug 3.5" Entry (ETY) Drives

|                    | Quantity<br>Supported | Position<br>Supported | Controller  |
|--------------------|-----------------------|-----------------------|---|
| 160GB 3G SATA 7.2K | Up to 4               | 1-4                   | HP Smart Array B110i SATA RAID Controller with RAID 0/1/1+0 support<br>HP Smart Array P212/Zero Memory Controller |



Storage

HP Smart Array P212/256 MB Controller  
HP Smart Array P410/256 MB Controller  
HP Smart Array P410/512 MB with BBWC Controller

SATA Hot Plug Midline (MDL) Solid State Drives

NOTE: SSD drives requires SFF drive cage.

|                     | Quantity<br>Supported | Position<br>Supported | Controller                                      |
|---------------------|-----------------------|-----------------------|---|
| 60GB 3.0G SATA SSD  | 8                     | 1-8                   | HP Smart Array P410/256 MB Controller           |
| 120GB 3.0G SATA SSD |                       |                       | HP Smart Array P410/512 MB with BBWC Controller |

SATA Hot Plug 3.5" Midline (MDL) Solid State Drives

|                     | Quantity<br>Supported | Position<br>Supported | Controller  |
|---------------------|-----------------------|-----------------------|---|
| 60GB 3.0G SATA SSD  | 4                     | 1-4                   | HP Smart Array P212/Zero Memory Controller  |
| 120GB 3.0G SATA SSD |                       |                       | HP Smart Array P212/256 MB Controller<br>HP Smart Array P410/256 MB Controller<br>HP Smart Array P410/512 MB with BBWC Controller |

External Storage

|   | Quantity<br>Supported | Position<br>Supported | Host Controller or Adapter  |
|---|-----------------------|-----------------------|---|
| 60 Modular Smart Array                      | Up to 8<br>Up to 4    | External              | HP Smart Array P411/512 BBWC Controller<br>HP Smart Array P212/256MB Controller |
| 70 Modular Smart Array                      | Up to 4<br>Up to 2    | External              | HP Smart Array P411/512 BBWC Controller<br>HP Smart Array P212/256MB Controller |
| HP 2000sa Modular<br>Smart Array Controller | Up to 4               | External              | HP SC08Ge Host Bus Adapter  |

Maximum Storage Capacity – (SAS drives)

|          |                              |
|----------|------------------------------|
| Internal | 2.4 TB (4 x 600GB SAS)       |
| External | 7.2TB (1 x (12 x 600GB SAS)) |
| Total    | 8.6 TB                       |

NOTE: In order to implement integrated SATA RAID with Smart Start 8.20 on Windows 2003, the use of a floppy drive is necessary.

Maximum Storage Capacity – (SATA Drives)

|          |                            |
|----------|----------------------------|
| Internal | 4TB (4 x 1TB SATA)         |
| External | 12TB (1 x (12 x 1TB SATA)) |
| Total    | 16TB                       |

Tape and Disk-Based Backup

NOTE: For a complete listing of compatible tape and disk-based backup offerings, please visit: [www.hp.com/go/connect](http://www.hp.com/go/connect)



Storage

|  | Position Supported | Controller                                     | Controller Part Number |
|--|--------------------|--|------------------------|
| HP StorageWorks SCSI Tape Drives, External     | External           | HP SC11Xe Host Bus Adapter                     | 412911-B21             |
| LTO-1 Ultrium 232                              |                    |  |                        |
| LTO-2 Ultrium 448                              |                    |  |                        |
| LTO-3 Ultrium 920                              |                    |  |                        |
| LTO-3 Ultrium 960                              |                    |  |                        |
| LTO-4 Ultrium 1760                             |                    |  |                        |
| LTO-4 Ultrium 1840                             |                    |  |                        |
| DAT 40   |                    |  |                        |
| DAT 72   |                    |  |                        |
| DAT 160  |                    |  |                        |
| 1U Rack-Mount Kit                              |                    |  |                        |
| 3U Rack-Mount Kit                              |                    |  |                        |
| HP StorageWorks USB Tape Drives, External      | External           | USB 2.0 Port                                   | N/A                    |
| DAT 40 USB                                     |                    |  |                        |
| DAT 72 USB                                     |                    |  |                        |
| DAT 160 USB                                    |                    |  |                        |
| 1U USB Rack-Mount Kit                          |                    |  |                        |
| HP StorageWorks SAS Tape Drives, External      | External           | HP SC44Ge Host Bus Adapter                     | 416096-B21             |
| DAT 160 SAS                                    |                    |  |                        |
| LTO-2 Ultrium 448 SAS                          |                    |  |                        |
| LTO-3 Ultrium 920 SAS                          |                    |  |                        |
| LTO-4 Ultrium 1760 SAS                         |                    |  |                        |
| LTO-4 Ultrium 1840 SAS                         |                    |  |                        |
| 1U Rack-Mount Kit                              |                    |  |                        |
| 3U Rack-Mount Kit                              |                    |  |                        |
| HP StorageWorks SCSI Tape Automation, External | External           | HP SC11Xe Host Bus Adapter                     | 412911-B21             |
| DAT 72x10 Autoloader                           |                    |  |                        |
| 1/8 G2 Tape Autoloader                         |                    |  |                        |
| MSL2024  |                    |  |                        |
| MSL4048  |                    |  |                        |
| MSL8096  |                    |  |                        |
| MSL6000  |                    |  |                        |
| HP StorageWorks SAS Tape Automation, External  | External           | HP SC44Ge Host Bus Adapter                     | 416096-B21             |
| 1/8 G2 Autoloader                              |                    |  |                        |
| MSL2024  |                    |  |                        |
| MSL4048  |                    |  |                        |
| HP StorageWorks Fibre                          | External           | Please consult the EBS connectivity matrix at: | N/A                    |



## Storage

Tape Automation, External <http://www.hp.com/go/ebs> for detailed connectivity information.  
MSL2024  
MSL4048  
MSL8096  
MSL6000

|  |          |              |     |
|--|----------|--------------|-----|
| HP StorageWorks RDX Removable Disk Backup System | External | USB 2.0 Port | N/A |
| RDX160   |          |              |     |
| RDX320   |          |              |     |
| RDX500   |          |              |     |

|                                    |          |                             |     |
|------------------------------------|----------|-----------------------------|-----|
| HP StorageWorks D2D Backup Systems | External | Embedded Network Controller | N/A |
| D2D120                             |          |                             |     |
| D2D130                             |          |                             |     |
| D2D2500i                           |          |                             |     |
| D2D4000i                           |          |                             |     |

Power Specifications

|   |      |      |      |      |      |      |  |
|---|------|------|------|------|------|------|--|
| HP 500W Power Supply                            |      |      |      |      |      |      |  |
| Part Number - AC 500W PSU 515915-B21 Option Kit |      |      |      |      |      |      |  |
| Input Voltage Range (Vrms) 100 to 240           |      |      |      |      |      |      |  |
| Frequency Range (Nominal) (Hz) 47/63            |      |      |      |      |      |      |  |
| Nominal Input Voltage (Vrms)                    | 100  | 120  | 200  | 220  | 230  | 240  |  |
| Maximum Rated Output Wattage                    | 500  | 500  | 500  | 500  | 500  | 500  |  |
| Nominal Input Current (A rms)                   | 5.74 | 4.99 | 2.86 | 2.58 | 2.46 | 2.36 |  |
| Max Rated Input Wattage Rating (Watts)          | 568  | 568  | 562  | 556  | 556  | 556  |  |
| Max. Rated VA (Volt-Amp)                        | 574  | 574  | 573  | 567  | 567  | 567  |  |
| Efficiency (%) at Max. Rated Output Wattage     | 88   | 88   | 89   | 90   | 90   | 90   |  |
| Power Factor                                    | 0.99 | 0.99 | 0.98 | 0.98 | 0.98 | 0.98 |  |
| Leakage Current (mA)                            | 0.42 | 0.50 | 0.81 | 0.91 | 0.95 | 1.00 |  |
| Max. Inrush Current (A peak)                    | 30   | 30   | 30   | 30   | 30   | 30   |  |
| Max. Inrush Current duration (mS)               | 20   | 20   | 20   | 20   | 20   | 20   |  |
| Maximum British Thermal Unit Rating (BTU-Hr)    |      |      |      |      |      |      |  |

|   |      |      |      |      |      |      |      |
|---|------|------|------|------|------|------|------|
| HP 460W Power Supply                            |      |      |      |      |      |      |      |
| Part Number - AC 460W PSU 503296-B21 Option Kit |      |      |      |      |      |      |      |
| Input Voltage Range (Vrms) 100 to 240           |      |      |      |      |      |      |      |
| Frequency Range (Nominal) (Hz) 50/60            |      |      |      |      |      |      |      |
| Nominal Input Voltage (Vrms)                    | 100  | 120  | 200  | 208  | 220  | 230  | 240  |
| Maximum Rated Output Wattage                    | 460  | 460  | 460  | 460  | 460  | 460  | 460  |
| Nominal Input Current (A rms)                   | 5.5  | 4.5  | 2.6  | 2.5  | 2.4  | 2.3  | 2.2  |
| Max Rated Input Wattage Rating (Watts)          | 526  | 520  | 505  | 505  | 503  | 503  | 503  |
| Max. Rated VA (Volt-Amp)                        | 548  | 542  | 527  | 527  | 524  | 524  | 524  |
| Efficiency (%) at Max. Rated Output Wattage     | 87.5 | 88.5 | 91   | 91   | 91.5 | 91.5 | 91.5 |
| Power Factor                                    | 0.97 | 0.97 | 0.97 | 0.97 | 0.97 | 0.97 | 0.97 |
| Leakage Current (mA)                            | 0.42 | 0.50 | 0.83 | 0.87 | 0.92 | 0.96 | 1.00 |
| Max. Inrush Current (A peak)                    | 30   | 30   | 30   | 30   | 30   | 30   | 30   |
| Max. Inrush Current duration (mS)               | 20   | 20   | 20   | 20   | 20   | 20   | 20   |
| Maximum British Thermal Unit Rating (BTU-Hr)    | 1794 | 1773 | 1725 | 1725 | 1715 | 1715 | 1715 |

Power Specifications

|  |      |      |      |      |      |      |      |
|--|------|------|------|------|------|------|------|
| HP 400W Power Supply                         |      |      |      |      |      |      |      |
| Part Number - AC 400W PSU 532092-B21         |      |      |      |      |      |      |      |
| Input Voltage Range (Vrms) 100 to 240        |      |      |      |      |      |      |      |
| Frequency Range (Nominal) (Hz) 50/60         |      |      |      |      |      |      |      |
| Nominal Input Voltage (Vrms)                 | 100  | 120  | 200  | 208  | 220  | 230  | 240  |
| Maximum Rated Output Wattage                 | 400  | 400  | 400  | 400  | 400  | 400  | 400  |
| Nominal Input Current (A rms)                | 5.5  | 5.0  | 2.5  | 2.4  | 2.3  | 2.2  | 2.1  |
| Max Rated Input Wattage Rating (Watts)       | 510  | 500  | 480  | 480  | 480  | 480  | 480  |
| Max. Rated VA (Volt-Amp)                     | 520  | 520  | 500  | 500  | 500  | 500  | 500  |
| Efficiency (%) at Max. Rated Output Wattage  | 83.0 | 84.0 | 86.0 | 86.0 | 87.0 | 87.0 | 87.0 |
| Power Factor                                 | 0.97 | 0.97 | 0.97 | 0.97 | 0.97 | 0.97 | 0.97 |
| Leakage Current (mA)                         | 0.75 | 0.75 | 0.85 | 0.90 | 0.95 | 0.95 | 1.00 |
| Max. Inrush Current (A peak)                 | 35   | 35   | 35   | 35   | 35   | 35   | 35   |
| Max. Inrush Current duration (mS)            | 20   | 20   | 20   | 20   | 20   | 20   | 20   |
| Maximum British Thermal Unit Rating (BTU-Hr) | 1739 | 1705 | 1636 | 1636 | 1636 | 1636 | 1636 |

NOTE: To review typical system power ratings use the Active Answers Power Advisor which is available via the online tool located at URL: [www.hp.com/go/proliant-energy-efficient](http://www.hp.com/go/proliant-energy-efficient) or [www.hp.com/go/hppoweradvisor](http://www.hp.com/go/hppoweradvisor).

Technical Specifications

|   |   |  |                   |
|---|---|--|-------------------|
| System Unit                               | Dimensions (H x W x D)<br>(with bezel)  | 1.70 x 17.64 x 26.85 in (4.32 x 44.80 x 68.19 cm)  |                   |
|   | Weight<br>(approximate)   | Maximum<br>(four hard drives, power supply, and processor installed)   | 29.95 lb (13.6kg) |
|   |   | Minimum<br>(one hard drive, power supply, and processor installed)   | 25.52lb (11.6kg)  |
| Input Requirements<br>(per power supply)  | Range Line Voltage  | 90 - 132 VAC,<br>180 - 264 VAC   |                   |
|   | Rated Input Current   | 6 A (at 100 VAC),<br>3 A (at 200 VAC)  |                   |
|   | Rated Input Frequency   | 47 to 63 Hz  |                   |
|   | Rated Input Power   | 486 W (at 100 VAC),<br>479 W (at 200 VAC)  |                   |
| BTU Rating                                | Maximum   | 1836 BTU/hr (at 100 VAC),<br>1706 BTU/hr (at 200 VAC)  |                   |
| Power Specifications                      | <b>NOTE:</b> To review typical system power ratings use the HP Power Advisor which is available online located at url: <a href="http://www.hp.com/go/proliant-energy-efficient">www.hp.com/go/proliant-energy-efficient</a> or <a href="http://www.hp.com/go/hppoweradvisor">www.hp.com/go/hppoweradvisor</a> |  |                   |
|   | - Click on the system of interest. Example: DL320 G6  |  |                   |
|   | - Follow the instructions of the next screens.  |  |                   |
| Power Supply Output<br>(per power supply) | Rated Steady-State Power  | 400 W (at 100 VAC),<br>400 W (at 200 VAC)  |                   |
|   | Maximum Peak Power  | 400 W (at 100 VAC),<br>400 W (at 200 VAC)  |                   |
| System Inlet Temperature                  | Operating   | 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. |                   |
|   |   | System performance may be reduced if operating with a fan fault or above 30°C (86°F).  |                   |
|   | Non-operating   | -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).   |                   |
| Relative Humidity<br>(non-condensing)     | Operating   | 10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.  |                   |
|   | Non-operating   | 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.  |                   |
| Altitude                                  | Operating   | 3050 m (10,000 ft). This value may be limited by the type and number of options installed.   |                   |



Technical Specifications

|                                |  |   |
|--------------------------------|--|---|
|                                |  | Maximum allowable altitude change rate is 457 m/min (1500 ft/min).  |
|                                | Non-operating  | 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).  |
| Acoustic Noise                 | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). |   |
|                                | Idle   |   |
|                                | LWAd   | 6.25 B  |
|                                | LpAm   | 51.4dBA   |
|                                | Operating  |   |
|                                | LWAd   | 6.25 B  |
|                                | LpAm   | 51.4 dBA  |
| Emissions Classification (EMC) | FCC Rating   | Class A   |
|                                | Normative Standards  | CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1 |

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

|              |                                    |                     |  |
|--------------|------------------------------------|---------------------|--|
| Power Supply | Input voltage specifications       | Rated input voltage | 100 VAC to 240 VAC   |
|              | Input Specifications               | Rated input line    | 90 VAC to 264VAC   |
|              |                                    | Frequency range     | 47 to 63 Hz  |
|              |                                    | Rated input power   | @ 115V input, Rated input power = 486W (assume output wattage=450W)<br>@ 230V input, Rated input power = 479W (assume output wattage=450W) |
|              |                                    | Rated input current | 6 A, 3 A (110 V, 220 V)  |
|              |                                    | Steady state power  | 420W (rated)   |
|              | BTU Rating                         | 1710 BTU/hr         |  |
|              | Ambient temperature range          | Operating           | 50° to 118° F (10° to 48° C)   |
|              |                                    | Non-operating       | -40° to 158° F (-40° to 70° C)   |
|              | Relative humidity (non-condensing) | Operating           | 55% to 85%   |
|              |                                    | Non-operating       | 5% to 95%  |
|              | Dielectric voltage withstand       | Input to output     | 1800 VAC/minute  |
|              |                                    | Input to ground     | 1800 VAC/minute  |
|              | Maximum Wet Bulb Temperature       | 106.3° F (41.3° C)  |  |

Technical Specifications

|                                  |   |  |
|----------------------------------|---|--|
| Integrated Serial ATA Controller | Simultaneous drive transfer channels            | 4 channels   |
|                                  | Transfer rate synchronous (maximum theoretical) | 150 MB/s per channel   |
|                                  | Data transfer method                            | HP Smart Array B110i SATA RAID Controller (non-RAID mode)<br>HP Smart Array B110i SATA RAID Controller (RAID Mode)   |
|                                  | Drive support                                   | Serial ATA   |
|                                  | Data transfer modes                             | Legacy Mode<br>Combined Mode   |
|                                  | Protocol  | Serial ATA   |
|                                  | Feature   | NCQ (Native Command Queuing); AHCI (Advanced Host Controller Interface)  |
|                                  | RAID levels supported                           | 0, 1, 1+0  |
|                                  | RAID Features                                   | Supports multiple logical volumes<br>Setup through ROM based Array Configuration Utility<br>Installation scripting support<br><a href="#">NOTE: This controller does not support Hot Plug functions or LED functions.</a>        |
|                                  | RAID OS Support                                 | Microsoft Windows Server 2003/2008<br><a href="#">NOTE: In order to implement integrated SATA RAID with Smart Start 8.20 on Windows 2003/2008, the use of a floppy drive is necessary.</a><br>Linux (Red Hat, SuSE, UnitedLinux) |

|  |                       |  |
|--|-----------------------|--|
| Embedded NC326i Dual Port Gigabit Server Adapter | Network Interface     | 10Base-T/<br>100Base-TX/<br>1000Base-TX                                  |
|  | Compatibility         | IEEE 802.3 10Base-T<br>IEEE 802.3ab 1000Base-T<br>IEEE 802.3u 100Base-TX |
|  | Data Transfer Method  | Four lane (x4), 100MHz PCI Express Reference Clock                       |
|  | Network Transfer Rate | 10Base-T (Half-Duplex) 10 Mb/s   |
|  |                       | 10Base-T (Full-Duplex) 20 Mb/s   |
|  |                       | 100Base-TX (Half-Duplex) 100 Mb/s  |
|  |                       | 100Base-TX (Full-Duplex) 200 Mb/s  |
|  |                       | 1000Base-TX (Half and Full-Duplex) 2000 Mb/s                             |
|  | Connector             | RJ-45  |
|  | Cable Support         | 10Base-T Categories 3, 4 or 5 UTP; up to 328 ft (100 m)                  |
|  |                       | 10/100/1000Base-TX Category 5 UTP; up to 328 ft (100 m)                  |

## Technical Specifications

### Environment-friendly Products and Approach and Recycling

End-of-life Management Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

---

© Copyright 2009 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation.

Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.